LOCC-BOX MINI 1-8 A

716480
Elektronisk sikring 24 V DC/1-8 A Alarm ved fejl




- Inkluderet minus forbindelse
- Justerbar strøm 1-8 A
- Løser pålideligt 12/24 V DC-kredsløb
- Valgbar karakteristik
- Tilpasset til trang plads i tavlen


PRODUKTBESKRIVELSE


SPECIFIKATIONER


Bredde	81 mm
Dybde	92 mm
EMC	EN61000-6-2, EN61000-6-4
Godkendelser	CE
Højde	87 mm
Indgangsstrøm max	8 A
IP-klasse	IP20
Justerbar strømområde max	8 A
Justerbar strømområde min.	1 A
Justerbare trin	1 A
Kapacitans max	10000 µF
Montering	DIN-skinne
Reaktionstid	800 ms
Spændingsfald over halvlederen	180 mV
Statusindikering	Lysdiode. Konstant grøn: OK; Blinkende Orange: 90 % last; Blinkende rød: Udløst sikring
Styrespænding DC max	30 V


Styrespænding DC min	10 V
Temperaturområde fra	-25 °C
Temperaturområde til	50 °C
Tilslutning	Fjeder 0,25-2,5 mm²
Tilslutningstværsnit maks	25 mm²
Tilslutningstværsnit min	25 mm²
Udgangshalvledere	MOSFET
Udgangsstrøm max	8 A
Vægt	60 g

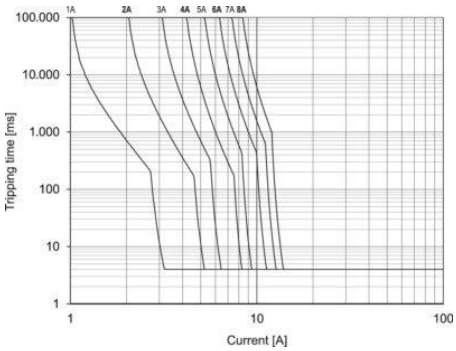


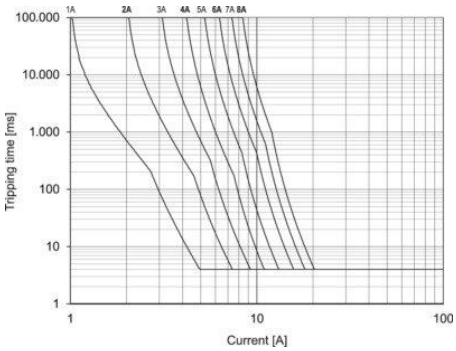


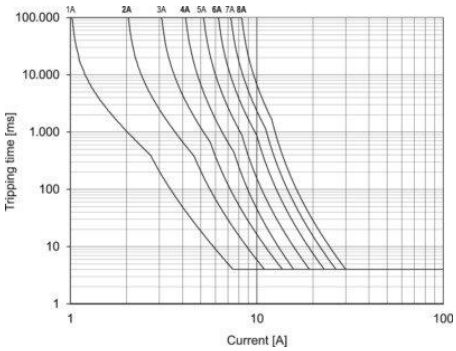


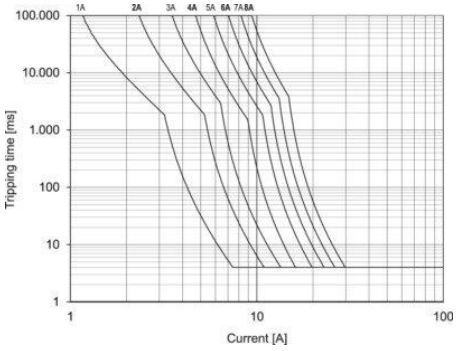


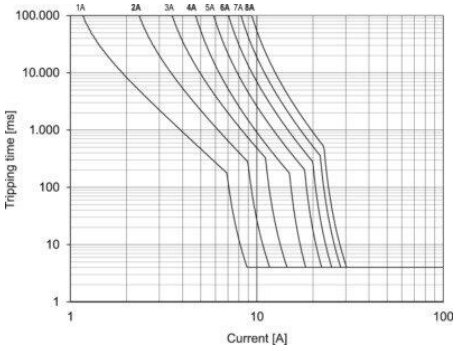




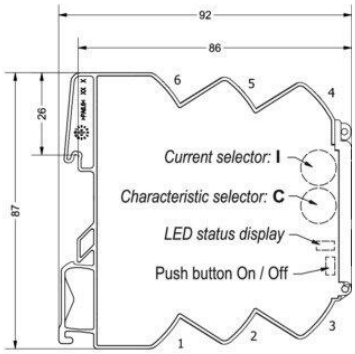


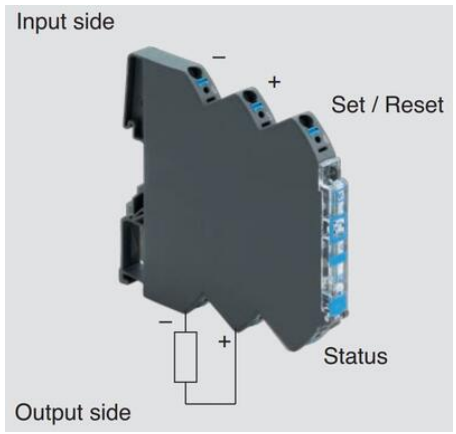

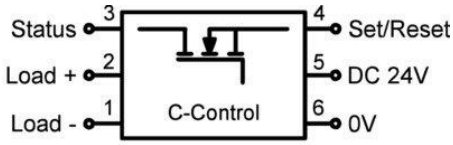

1: Load -
2: Load +
3: Status output
4: Set/Reset
5: DC +24V
6: 0V

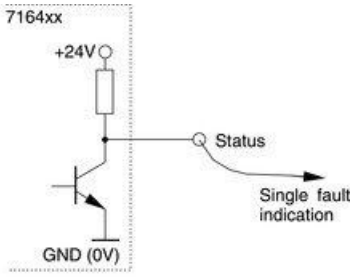

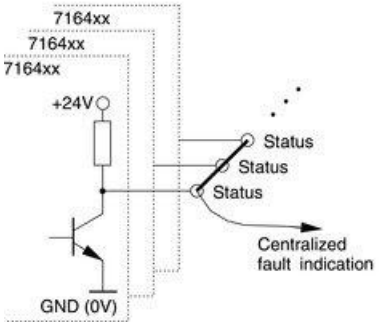

LED Status, Button, Rotary Switch

LED green	*ON*	*Function is OK**
LED green, flashing 1 Hz	*Overload*	*Load above 90 % of I nominal*
LED green, flashing 5 Hz	*Overload*	*Load above 100 % of I nominal*
LED red	*OFF*	*Module switched off or acknowledged**
LED red, flashing 1 Hz	*Overload*	*Output off due to overload/short circuit**
LED red, flashing 5 Hz	*Error*	*Wiring error – feedback (internal error)*
LED red, flashing shortly	*OFF*	*Output off via remote set/reset*
LED red/green, flashing 1 Hz	*ON*	*Target settings via rotary switch deviate from actual settings.* ***NOTICE: Switching off and on via pushbutton required.***
*Button ****	*ON/OFF*	*Nominal operation: ON/OFF* *Load monitoring tripped: 1st push: acknowledge* *2nd push: ON*
*Rotary Switch (I) – Switch Position***		*Rated current, see page 4.*
*Rotary Switch (C) – Switch Position***		*Characteristic: 1: fast 2: middle* *3: slow-1 4: slow-2 5: slow-3*

** If the operating voltage is switched off, the last status is saved (Default).*
*** Accept the setting - after switching on again via the button, not by Remote Set/Reset*
**** Master function - switch off via push button, can only be switched on again via push button*

For further information see also the operating instructions