

PTFE-SLANGE, GLAT, SS-FLETNING (SAE 100R14)

Serie Speed-Flow, -R14



TR14003
Speed-Flow-R14, 1/8"


- Dimensioner 1/8" til 1 1/8"
- Rustfrit stålflet for mekanisk beskyttelse
- I henhold til standard SAE 100R14

PRODUKTBEKRIVELSE

SPECIFIKATIONER


Diameter indre	3 mm
Diameter ydre	6 mm
Max arbejdsstryk	105 bar
Sprængtryk	827 bar
Temperaturområde	-70°C +260°C

TR14

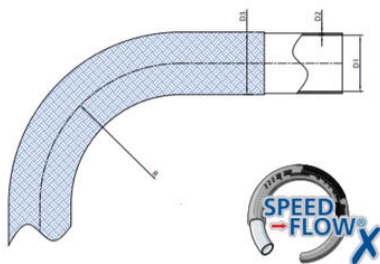

Size	Dash	D1		D2		D3		R	WP	BP	Weight	REF
inch		min	max	min	max	min	max	mm	Bar/20°C	Bar	g/m	VRGIN
1/8"	3	3.3	3.8	0.90	5.3	6.8	40	105	827	65	65	TR14003
3/16"	4	4.4	5.2	0.90	7.1	8.2	50	105	689	90	90	TR14006
1/4"	5	6	6.9	0.75	8.9	10.1	75	105	600	94	94	TR14006
5/16"	6	7.5	8.4	0.65	10.41	11.6	100	105	552	141	141	TR14008
3/8"	7	9.1	10	0.65	12.2	13.4	125	105	483	148	148	TR14009
1/2"	8	9.9	10.9	0.90	12.9	14.3	135	70	414	148	148	TR14010
5/8"	10	12.3	13.3	0.90	15.3	16.8	165	56	414	249	249	TR14012
3/4"	12	15.3	16.5	0.90	18.6	20.10	200	56	345	290	290	TR14016
7/8"	14	18.4	19.6	1.00	21.3	23.3	230	56	276	339	339	TR14019
1"	16	21.4	23	1.00	24.6	26.9	230	56	241	382	382	TR14022
1 1/8"	18	24.6	26.2	1.20	27.8	29.8	300	56	241	461	461	TR14025
1 1/2"	20	27.8	29.4	1.2	31.9	33.5	410	42	172	520	520	TR14028

TR14

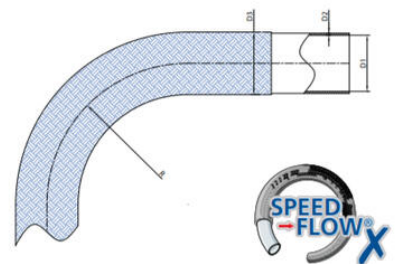

Size	Dash	D1		D2		D3		R	WP	BP	Weight	REF
inch		min	max	min	max	min	max	mm	Bar/20°C	Bar	g/m	VRGIN
1/8"	3	3.3	3.8	0.90	5.3	6.8	40	105	827	65	65	TR14003
3/16"	4	4.4	5.2	0.90	7.1	8.2	50	105	689	90	90	TR14006
1/4"	5	6	6.9	0.75	8.9	10.1	75	105	600	94	94	TR14006
5/16"	6	7.5	8.4	0.65	10.41	11.6	100	105	552	141	141	TR14008
3/8"	7	9.1	10	0.65	12.2	13.4	125	105	483	148	148	TR14009
1/2"	8	9.9	10.9	0.90	12.9	14.3	135	70	414	148	148	TR14010
5/8"	10	12.3	13.3	0.90	15.3	16.8	165	56	414	249	249	TR14012
3/4"	12	15.3	16.5	0.90	18.6	20.10	200	56	345	290	290	TR14016
7/8"	14	18.4	19.6	1.00	21.3	23.3	230	56	276	339	339	TR14019
1"	16	21.4	23	1.00	24.6	26.9	230	56	241	382	382	TR14022
1 1/8"	18	24.6	26.2	1.20	27.8	29.8	300	56	241	461	461	TR14025
1 1/2"	20	27.8	29.4	1.2	31.9	33.5	410	42	172	520	520	TR14028