

"SPLITTER" SIGNALKONVERTER

1-indgang og 2 separate udgange til
standardsignaler, programmerbare PC'er eller via
kontakter

750321

Signal conv. 1-in/2-out, splitter 24VAC/DC


- 6,2 mm bred
- Valgbare ind- og udgange
- 4-vejs galvanisk adskillelse 2,5 kV
- Automatisk kalibrering
- 24 V AC / DC driftsspænding




PRODUKTBESKRIVELSE

SPECIFIKATIONER


Indgangsimpedans strøm mA	0,1 Ω
Indgangsimpedans spænding	500 k Ω
Lastimpedans strøm	400 Ω @ 0–20 mA, 4–20 mA
Lastimpedans spænding	>2 k Ω @ 0–10 V
Tilslutningstværsnit min	0,14 mm ²
Tilslutningstværsnit maks	1,5 mm ²
Styrespænding	24 V DC
Styrespænding DC max	30 V
Styrespænding DC min	16,8 V
Isolationsspænding ind / ud	2500 V
Effektforbrug	13 mA
Godkendelser	CE, DNV, GL, RoHS

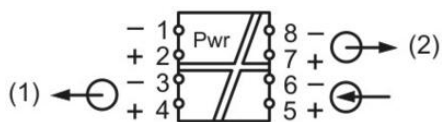

S1 ● → Switch On									
Range	1	2	3	4	5	6	7	8	
0-10V	●	●		●		●			
0-20mA	●			●		●			
4-20mA	●	●		●		●	●		
Input		Output 1		Output 2					
Filter Off									
Filter On							●		
Output Limitation Off									
Output Limitation On									●

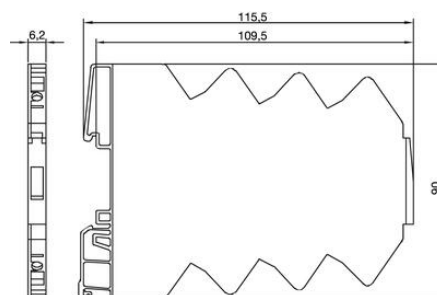

See instruction leaflet for details

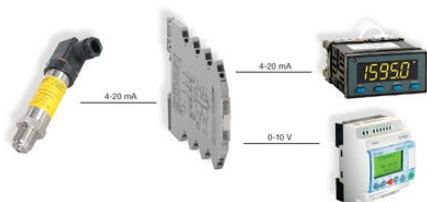

S1		● → Switch On						
Range	1	2	3	4	5	6	7	8
0-10V	●		●		●			
0-20mA	●	●	●	●	●	●		
4-20mA	●	●	●	●	●	●		
Input		Output 1		Output 2				
Filter Off								
Filter On							●	
Output Limitation Off								
Output Limitation On								●

See instruction leaflet for details

