

COMPACT, HIGH PURITY, BIOTECH, PHARMA, SPRING OG DOME LOADED, DIAPHRAM SENSOR

PH-3200 Serien Trykreducerende regulator

PH3200




- CV: 1.8, 1.0
- Temperatur: -40°C til 74°C
- Sanitary, Tube og High Purity Connection
- Single-stage regulator
- FDA Compliant





PRODUKTBESKRIVELSE

Alle regulatorer i denne serie er specielt udviklet til pharma- og biotekindustrien. De er alle i rustfri stål og kan leveres med al nødvendig dokumentation. Det er single-stage regulatorer, der yder en meget nøjagtig regulering. Designet af denne serie sikrer en høj gasrenhed og integritet og kan med fordel anvendes ved ren damp i sanitære applikationer, i paneler eller til regulering af specialgasser og hvor dannes affaldsgasser.

For more information on how to read flow curves, please refer to the Flow Curves and Calculations document (dbsu20074012) in the TESCOM catalog or on www.tescom.com.

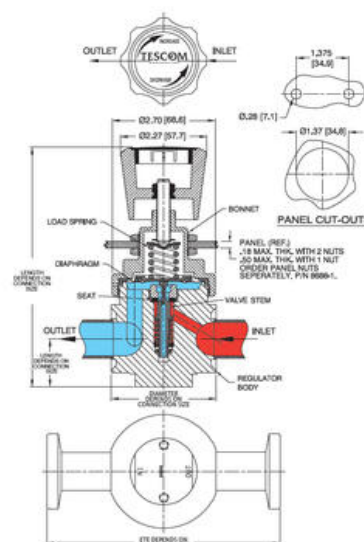

All dimensions are reference & nominal
Metric [imperial] equivalents are in brackets

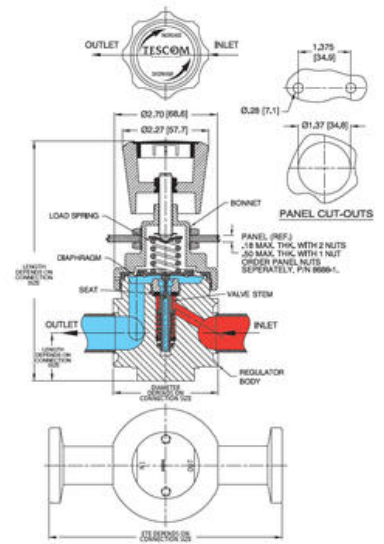

All dimensions are reference & nominal
Metric (millimeter) equivalents are in brackets.