



PDF af favoritter

TESCOM™

## HØJTRYKSVENTIL

HPV-SERIEN

High Pressure Valve

- Norminal tryk: 300 bar
- Temperaturområde: -20 til 70°C
- Vægt: 0.65 kg



D41935

## PRODUKTBESKRIVELSE

### Tescom Højtryksventil

Til levering af højrenhedsgasser i laboratoriegasforsyningssljer.

### Applikationer

- Højtrykssystemer
- Højflow-systemer
- Egnet til gasapplikationer med en renhed på 5.0
- Kan bruges på hovedlinjer
- Kan bruges i specialpanel-løsninger

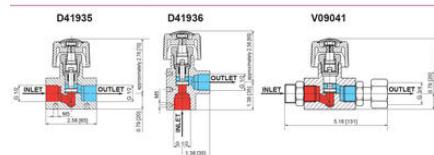
### Fordele

- Ingen forurening af gas på grund af fuldt metal design
- Meget høje flow
- Pålideligt design
- Dokumenteret og sikkert design
- Lang levetid
- Nem at installere og vedligeholde
- Valgfri farvet gaskode på håndgrebet for nem identifikation

Example for selecting a part number:

TYPE	AD	GASES	CONNECTIONS	00
D41935 – Straight valve DN 10	AO	Oxygen, non-corrosive gases and gas mixtures with more than 20% O <sub>2</sub>	00 – Standard G 1/2" female	
V09041 – Straight valve with inlet G 1/4" and outlet G 1/2" and mounting nut				
D41936 – Angle valve DN 10 not for Oxygen and Carbon above 20 bar	AR	Non-corroso-gas mixtures	00 – Standard G 1/2" female	

### High Pressure Valve Drawings

All dimensions are reference & nominal  
Metric [Inch] equivalents are in brackets

### Example for selecting a part number:

TYPE	AD	GASES	CONNECTIONS	00
D41935 – Straight valve DN 10	AO	Oxygen, non-corrosive gases and gas mixtures with more than 20% O <sub>2</sub>	00 – Standard G 1/2" female	
V09041 – Straight valve with inlet G 1/4" and outlet G 1/2" and mounting nut				
D41936 – Angle valve DN 10 not for Oxygen and Carbon above 20 bar	AR	Non-corroso-gas mixtures	00 – Standard G 1/2" female	

High Pressure Valve Drawings

