

VN SERIEN

VN-SERIEN
VN-Serien

- Max indgangstryk: 689 bar
- Leak: Bubble tight
- Temperaturområde: -29 til 74°C
- CV: 20
- Vægt: 15.9 bar



PRODUKT BESKRIVELSE

Tescom VN Serien

En ventil med højt flow, der kan anvendes i begge retninger.

Applikation

- Højtryk/højflow-forsyningslinjer


Fordele

- Y-mønstreret flowbane
- Lavt moment på håndhjulet
- Udskiftelige bløde sæder
- Grayloc-nav-forbindelser er tilgængelige

Example for selecting a part number:

BASIC SERIES	BODY MATERIAL	SEAL MATERIAL	O-RING MATERIAL	INLET PORT SIZE	INLET PORT TYPE	OUTLET PORT SIZE	OUTLET PORT TYPE	GAUGE PORTS	MODIFICATION NUMBER
VN	6- 316 Stainless Steel	V- Polyside (Desp®-SP)	B- Nitrile, Buna N E- I-C W- FKM (Viton®-A)	12- 1.125"	9- Threaded Grayloc Hub	12- 1.125"	9- Flanged Grayloc Hub	2- 1/4" NPT	01- 1.127 Grayloc Hub

Pressure at which valve is used must be compatible with the pressure rating of the valve and port surface provided.

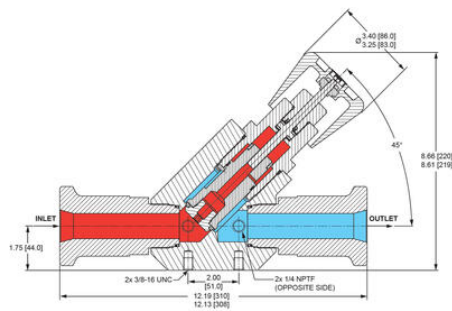

Example for selecting a part number:

BASIC SERIES	BODY MATERIAL	SEAL MATERIAL	O-RING MATERIAL	INLET PORT SIZE	INLET PORT TYPE	OUTLET PORT SIZE	OUTLET PORT TYPE	GAUGE PORTS	MODIFICATION NUMBER
VN	6- 316 Stainless Steel	V- Polyside (Desp®-SP)	B- Nitrile, Buna N E- I-C W- FKM (Viton®-A)	12- 1.125"	9- Threaded Grayloc Hub	12- 1.125"	9- Flanged Grayloc Hub	2- 1/4" NPT	01- 1.127 Grayloc Hub

Pressure at which valve is used must be compatible with the pressure rating of the valve and port surface provided.

