

## HØJ NØJAGTIGHED, NON-VENTING, SPRING, DOME OG AIR LOADED, DIAPHRAGM SENSOR

26-1500 serien Trykreducerede Regulator

26-1500  
26-1500 serien

- Max indgangstryk: 414 bar
- Max udgangstryk: 17.2 bar
- Temperaturområde: -40 til 74°C
- CV: 0.08
- Bubble-tight



### PRODUKTBESKRIVELSE

#### Tescom 26-1500 Serien

non-venting regulator som tilbyder stor nøjagtighed, stor elastomeric diaphragm design og et nøjagtigt udgangstryk til kontrollering.

#### Applikationer

- Research labs
- Breathing air diving manifolds
- Low flow purge systems
- Gas and liquid sapling

#### Fordele

Diaphragm design

Flere tilslutnings porte

God repeatability

Non-venting


Indstillig håndtag

Panel montering

Tilgængelig i AISI 316 SST, Messing og Aluminium



Gauge porte tilgængelig

Findes også i en "high flow" model (CV 0.24 med max indgangstryk på 207 bar)

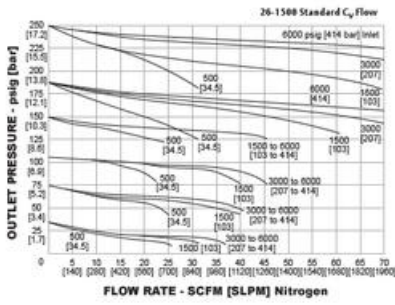


Example for selecting a part number:

BASIC SERIES	6	1	2	4
26-15	1 - Bron 3 - 2024 Aluminum 4 - 316 Stainless Steel	0 - 0.50 psig 0.3-4 bar 1 - 0.150 psig 0.1-1.1 bar 2 - 0.250 psig 0.1-2.2 bar	1 - SAE 2 - NPT 3 - MS3549	4 - 1/4" 6 - 3/8" 8 - 1/2" (Stainless Steel only)

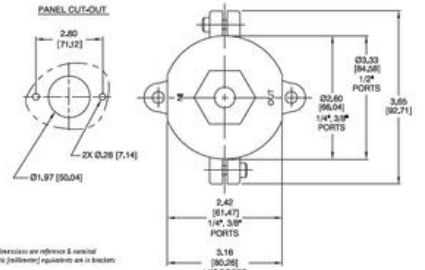
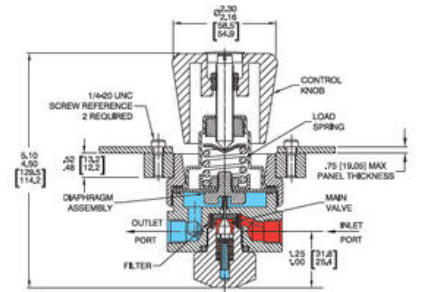


All dimensions are reference & nominal.  
Metric (in brackets) equivalents are in brackets.

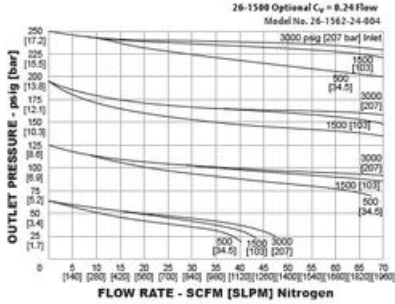

Example for selecting a part number:

BASIC SERIES	6	1	2	4
26-15	1 - Bron 3 - 2024 Aluminum 4 - 316 Stainless Steel	0 - 0.50 psig 0.3-4 bar 1 - 0.150 psig 0.1-1.1 bar 2 - 0.250 psig 0.1-2.2 bar	1 - SAE 2 - NPT 3 - MS3549	4 - 1/4" 6 - 3/8" 8 - 1/2" (Stainless Steel only)

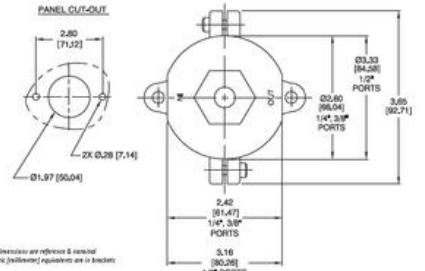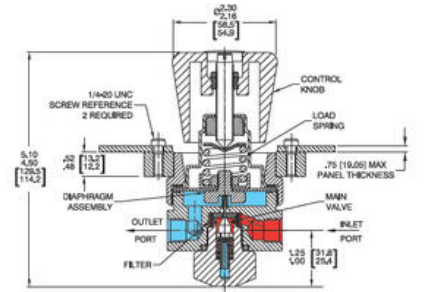

All dimensions are reference & nominal.  
Metric (in brackets) equivalents are in brackets.

