PRISVENLIG, SPRING, AIR OG DOME LOADED, PISTON SENSOR

44-1800 Trykreducerende regulator

44-1800
44-1800 serien



- Max indgangstryk: 414 bar
- Max udgangstryk: 172 bar
- Temperaturområde: -26 til 74°C
- CV: 0.06, 0.15
- Bubble-tight

PRODUKTBESKRIVELSE

Tescom 44-1800 Serien


Piston sensor trykreducerende regulator både tilgængelig i messing og AISI 316 rustfri stål med udgangstryk op til 172 bar.

Applikationer

- General purpose test stands
- Industrial equipment


Fordele


Low cost
Kompakt design
Piston sensor
Justerbar stop på udgangstryk
Tilgængelig i rustfri stål eller messing
Tilgængelig som "Venting"
Tilgængelig med flere forskellige tilslutning muligheder

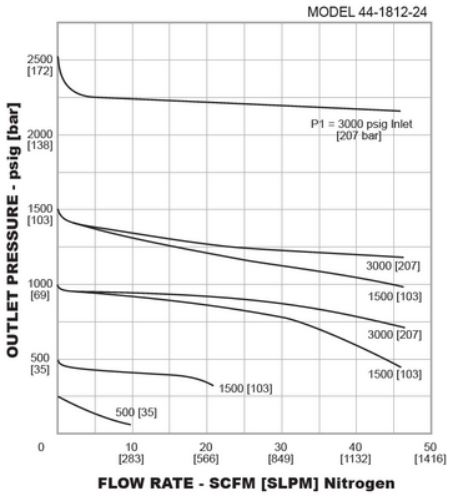


Example for selecting a part number:

44-18	1	2	-	2	4	V
BASIC SERIES	BODY MATERIAL	OUTLET PRESSURE RANGES		INLET AND OUTLET PORT TYPE	INLET AND OUTLET PORT SIZE	VENTING (OPTIONAL)
44-18	1 = Brass 6 = 316 Stainless Steel 9 = Nickel Alloy (Monel®)	1 = 0-1500 psig / 0-103 bar 2 = 0-2500 psig / 0-172 bar		2 = NPTF	4 = 1/4"	V = Venting



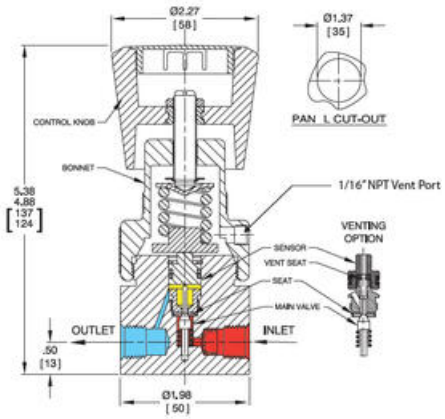

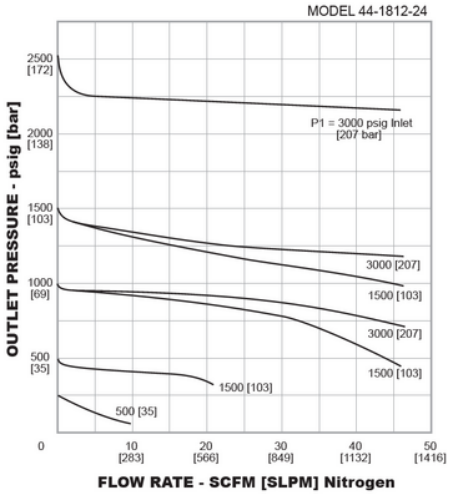

Example for selecting a part number:

44-18	1	2	-	2	4	V
BASIC SERIES	BODY MATERIAL	OUTLET PRESSURE RANGES		INLET AND OUTLET PORT TYPE	INLET AND OUTLET PORT SIZE	VENTING (OPTIONAL)
44-18	1 = Brass 6 = 316 Stainless Steel 9 = Nickel Alloy (Monel®)	1 = 0-1500 psig / 0-103 bar 2 = 0-2500 psig / 0-172 bar		2 = NPTF	4 = 1/4"	V = Venting

