

PRISVENLIG, SPRING, AIR OG DOME LOADED, PISTON SENSOR

44-1800 Trykreducerende regulator

44-1800
44-1800 serien

- Max indgangstryk: 414 bar
- Max udgangstryk: 172 bar
- Temperaturområde: -26 til 74°C
- CV: 0.06, 0.15
- Bubble-tight



PRODUKTBESKRIVELSE

Tescom 44-1800 Serien

Piston sensor trykreducerende regulator både tilgængelig i messing og AISI 316 rustfri stål med udgangstryk op til 172 bar.

Applikationer

- General purpose test stands
- Industrial equipment

Fordele

Low cost

Kompakt design

Piston sensor


Justerbar stop på udgangstryk

Tilgængelig i rustfri stål eller messing

Tilgængelig som "Venting"



Tilgængelig med flere forskellige tilslutning muligheder

MODEL 44-1812-24

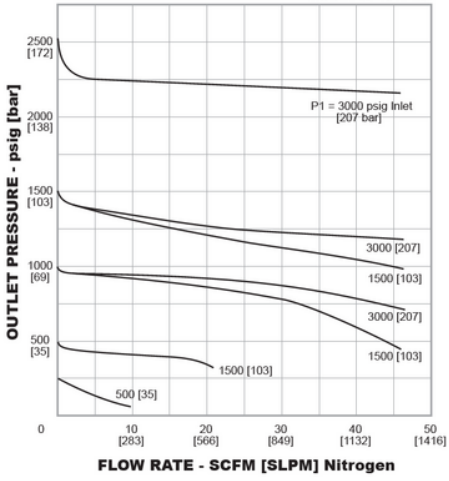


Example for selecting a part number:

44-18	1	2	2	4	V
BASIC SERIES	BODY MATERIAL	OUTLET PRESSURE RANGES	INLET AND OUTLET PORT TYPE	INLET AND OUTLET PORT SIZE	VENTING (OPTIONAL)
44-18	1 - Brass 8 - 316 Stainless Steel 9 - Nickel Alloy (Monel®)	1 - 0-1500 psig / 0-103 bar 2 - 0-2500 psig / 0-172 bar	2 - NPT	4 - 1/2"	V - Venting

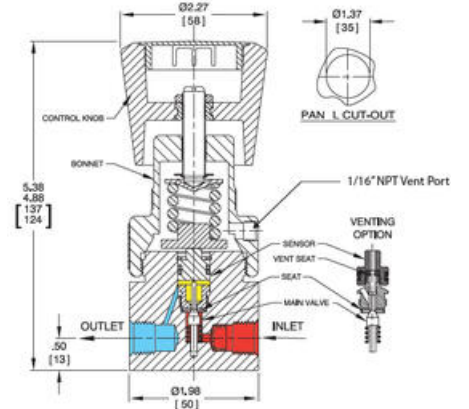

MODEL 44-1812-24

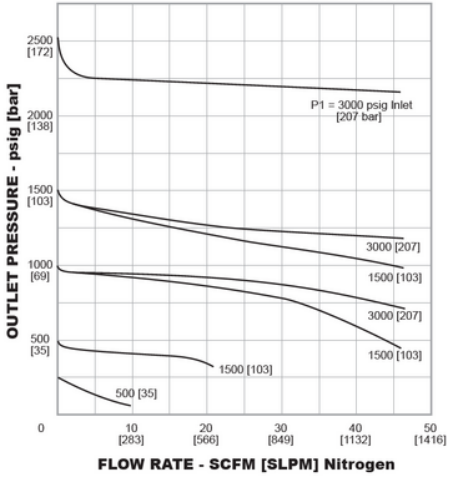

Example for selecting a part number:

44-18	1	2	2	4	V
BASIC SERIES	BODY MATERIAL	OUTLET PRESSURE RANGES	INLET AND OUTLET PORT TYPE	INLET AND OUTLET PORT SIZE	VENTING (OPTIONAL)
44-18	1 - Brass 8 - 316 Stainless Steel 9 - Nickel Alloy (Monel®)	1 - 0-1500 psig / 0-103 bar 2 - 0-2500 psig / 0-172 bar	2 - NPT	4 - 1/2"	V - Venting

