


SJS SERIEN

SJS



SJS REGULATOR SHOWN WITH THE 42MW WELDED DIAPHRAGM INSTRUMENT ISOLATOR (OPTIONAL)


PRODUKTBESKRIVELSE

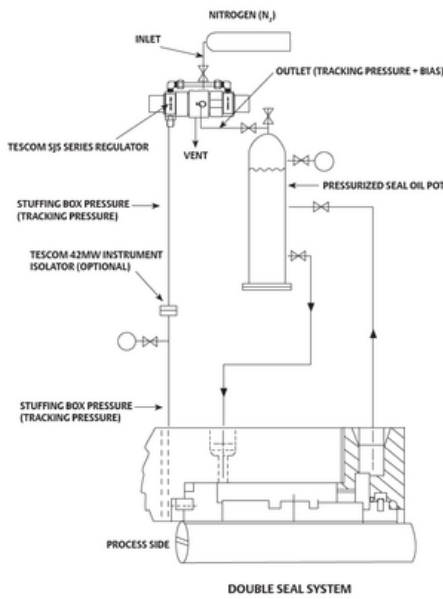

Example for selecting a part number:


BASIC SERIES	TYPE	BODY MATERIAL	OUTLET PRESSURE	O-RING MATERIAL	DIAPHRAGM MATERIAL	SEAT MATERIAL	FITTINGS OPTION	PORTING	INLET, VENT, AND OUTLET PORT TYPE
SJ	S	6	S	V	E	A	O	E	FFF
SJ	S	6	S	V	E	A	O	E	FFF


** FKM, Perfluorethenen (Kaloril)



NOTE:

△ INCLUDED WITH FITTING OPTION

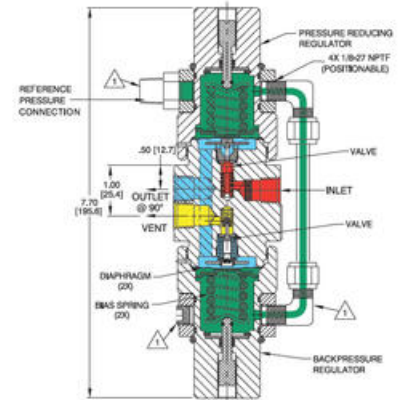


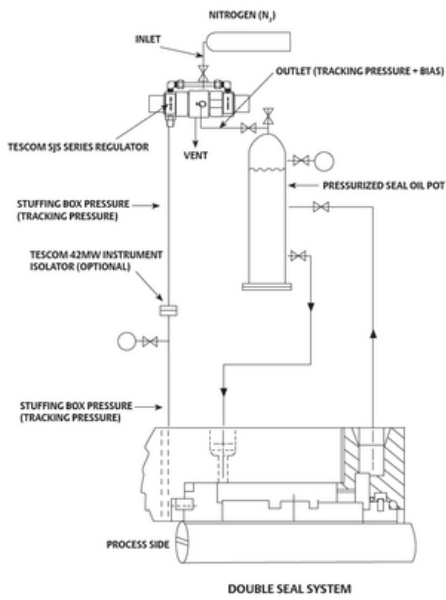

Example for selecting a part number:

SJ	S	6	S	V	E	A	O	E	FFF
BASIC SERIES	TYPE	BODY MATERIAL	OUTLET PRESSURE	O-RING MATERIAL	DIAPHRAGM MATERIAL	SEAT MATERIAL	FITTINGS OPTION	PORTING	INLET, VENT AND OUTLET PORT TYPE
SJ	S - Standard Adjustment	6 - 316 Stainless Steel	S - 500 (20g) 34.5 bar Max (20in + 1 bar pressure)	E - Ethylene Propylene K - Kalrez** V - Viton® A	E - Cobalt Chrome Nickel Alloy (Highly)	A - Pressure Reducing PTFE Backpressure Polyimide (Drop®) B - Pressure Reducing PTFE Backpressure PTFE	O - No fittings F - Fittings	E - 90°/180° FF - 1/4" NPT	FFF - 1/4" NPT

** 100% Perfluoroelastomer (Kalrez)



NOTE:
 INCLUDED WITH FITTING OPTION

