

PRISVENLIG, SPRING OG DOME LOADED, PISTON SENSOR

44-1700 Serien Backpressure Regulator

44-1700
44-1700 Serien

- Max Indgangstryk: 55.2 bar
- Pressure range: 2.8-10.3, 2.8-20.7, 6.9-48.3, 6.9-55.2 bar
- Leakage: Bubble-tight
- Temperaturområde: -26 til 60°C
- CV: 0.10



PRODUKTBESKRIVELSE

TESCOM 44-1700 Serien


Er en backpressure regulator til generelt brug, kompakt regulator til kontrol af tryk op til 55.2 bar.

Applikationer

- Industrial equipment for hydraulic or pneumatic service


Fordele

- Prisvenlig, kompakt design
- Piston sensor design som sikre pålideligheden
- Tilgængelig i AISI 316 Stainless Steel eller Messing design
- Flere muligheder for gauge ports og panel montering
- Flow kapacitet Cv = 0.10
- Low handknob torque for nem regulering
- Bubble-tight shutoff ved alle reseating pressures

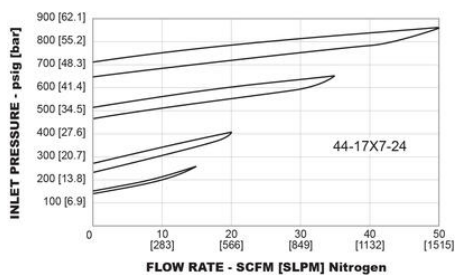

Example for selecting a part number:

44-17	6	7	2	4
BASIC SERIES	BODY MATERIAL	INLET PRESSURE	INLET AND OUTLET PORT TYPE	INLET AND OUTLET PORT SIZE
44-17	1 - Brass 6 - 316 Stainless Steel	2 - 40-150 psig 2.8-10.3 bar 3 - 40-300 psig 2.8-20.7 bar 7 - 100-300 psig 6.9-48.3 bar 8 - 100-800 psig 6.9-55.2 bar	2 - NPT	4 - 1/4"

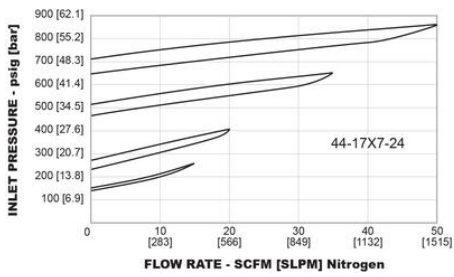

Example for selecting a part number:

44-17	6	7	-	2	4
BASIC SERIES	BODY MATERIAL	INLET PRESSURE	INLET AND OUTLET PORT TYPE	INLET AND OUTLET PORT SIZE	
44-17	1 - Brass 6 - 316 Stainless Steel	2 - 40-150 psig 7.8-10.3 bar 3 - 40-300 psig 2.8-20.7 bar 7 - 100-200 psig 6.9-13.8 bar 8 - 100-800 psig 6.9-55.2 bar	2 - NPT	4 - 1/4"	

