

BUBBLE-TIGHT, LOW FLOW, HIGH PURITY, SPRING OG DOME LOADED, DIAPHRAM SENSOR

PH-2200 Trykreducerende regulator

PHE22A08610A
PHE22A08610A



- CV: 0.06, 0.15 og 0.24
- Temperatur: -40° til 74°C
- Sanitary, Tube and High Purity Connections
- Høj nøjagtighed
- FDA Compliant



PRODUKTBESKRIVELSE


Alle regulatorer i denne serie er specielt udviklet til pharma- og biotekindustrien. De er alle i rustfri stål og kan leveres med al nødvendig dokumentation. Det er single-stage regulatorer, der yder en meget nøjagtig regulering. Designet af denne serie sikrer en høj gasrenhed og integritet og kan med fordel anvendes ved ren damp i sanitære applikationer, i paneler eller til regulering af specialgasser og hvor dannes affaldsgasser.

For more information on how to read flow curves, please refer to the Flow Curves and Calculations document (debu2007v01.1) in the TESCOM catalog or on www.tescom.com.

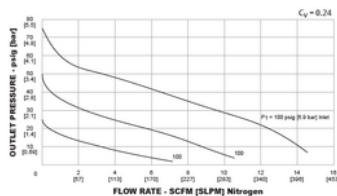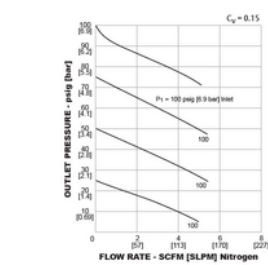

Example for selecting a part number:

PH-22	A	2	8	2	1	0	B			
BASIC SERIES	BODY MATERIAL	SEAT MATERIAL	VALVE SPRING	LOAD TYPE	OUTLET PRESSURE	INLET AND OUTLET PORT SIZE	INLET AND OUTLET PORT TYPE	FLOW CAPACITY	GAGE PORT OPTIONS	CERTIFICATE OF CONFORMANCE
PH-22	A - 316L Stainless Steel	PTFE	216 Stainless	8 - Spring	0.10 psig / 0.69 kPa	1/8" / 3.18 mm	Sanitary	1 - Cv = 0.06 2 - Cv = 0.15 4 - Cv = 0.24	0 - No gage 1 - One 1/4" NPT gage port at 90°	A - None B - Clean Service Certification
B	316L Stainless Steel	Actua [®] (PTFE)	216 Chrome Nickel	2 - Spring	0.50 psig / 3.45 kPa	1/4" / 6.35 mm	Diaph [®]	1 - Cv = 0.06 2 - Cv = 0.15 4 - Cv = 0.24	0 - No gage 1 - One 1/4" NPT gage port at 90°	A - None B - Clean Service Certification
C	316L Stainless Steel	PTFE	216 Stainless	8 - Spring	0.10 psig / 0.69 kPa	1/8" / 3.18 mm	Sanitary	1 - Cv = 0.06 2 - Cv = 0.15 4 - Cv = 0.24	0 - No gage 1 - One 1/4" NPT gage port at 90°	A - None B - Clean Service Certification
D	316L Stainless Steel	Actua [®] (PTFE)	216 Chrome Nickel Alloy (Diaph [®])	2 - Spring	0.50 psig / 3.45 kPa	1/4" / 6.35 mm	Diaph [®]	1 - Cv = 0.06 2 - Cv = 0.15 4 - Cv = 0.24	0 - No gage 1 - One 1/4" NPT gage port at 90°	A - None B - Clean Service Certification



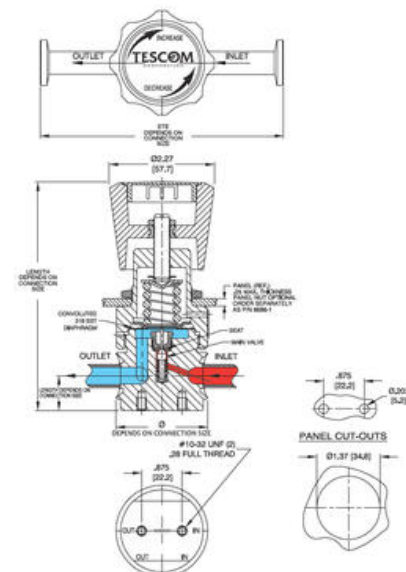


All dimensions are reference & nominal
Metric (millimeter) equivalents are in brackets

For more information on how to read flow curves, please refer to the Flow Curves and Calculations document (debu2007v01.1.2) in the TESCOM catalog or on www.tescom.com.

Example for selecting a part number:

PH-22	A	2	8	0	1	0	B			
BASIC SIZES	BODY MATERIAL	SEAT MATERIAL FINISH	VALVE SPRING	LOAD TYPE	ORIFICE PRESSURE	INLET AND ORIFICE PORT TYPE	INLET AND ORIFICE PORT SIZE WALL THICKNESS	FLOW CAPACITY	GAGE PORT OPTIONS	CERTIFICATE OF CONFORMANCE
PH-22	A - 316L Stainless Steel	15T ₂ Stainless Steel	F716 Stainless Steel	8 - Spring	0.10 psig / 0.689 bar	8 - Secondary Inlet / 8 - Inlet	6 - 20" / 0.635" OD / 0.737" OD / 0.839" wall	1 - C _v = 0.65 2 - C _v = 0.15 4 - C _v = 0.24	0 - No gage port 1 - One 1/4" NPT female gage port at 90°	A - None B - Clean Service Certification
	B - 316L Stainless Steel	15T ₂ Acton® (PBR) Chrome Nickel Alloy	Acton® F716 Stainless Steel	2 - Spring	0.50 psig / 0.345 bar	2 - Spring Inlet / 2 - Inlet	4 - 12" / 0.589" OD / 0.689" wall			
	C - 316L Stainless Steel	22T ₂ Acton® (PBR) Chrome Nickel Alloy	F716 Stainless Steel	7 - Spring	0.10 psig / 0.689 bar	7 - Spring Inlet / 7 - Inlet	4 - 12" / 0.589" OD / 0.689" wall			
	D - 316L Stainless Steel	22T ₂ Acton® (PBR) Chrome Nickel Alloy	F716 Stainless Steel	5 - Spring Bar	0.10 psig / 0.689 bar	5 - Spring Bar Inlet / 5 - Inlet	4 - 12" / 0.589" OD / 0.689" wall			
				6 - Derive	0.10 psig / 0.689 bar	6 - Derive Inlet / 6 - Inlet				

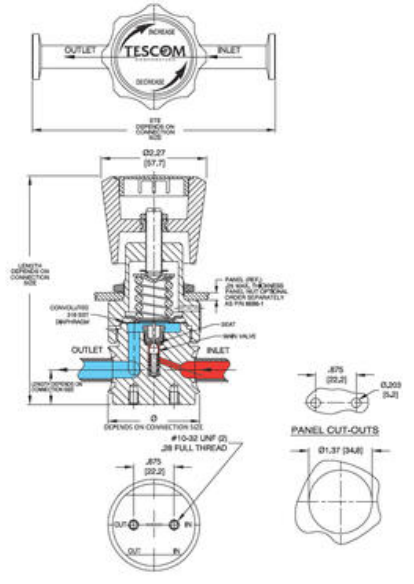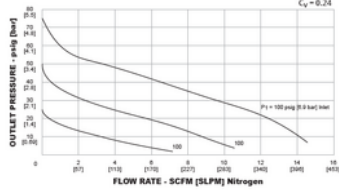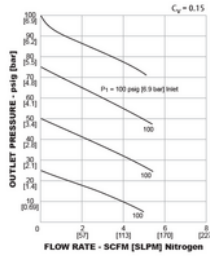

All dimensions are reference & nominal
Metric (in/bracket) equivalents are in brackets