



KAPILARRØRSTERMOMETER I RUSTFRIT STÅL

Serie 70

H70-14351252

Ø100 0-100°C 100x6mm L=3m glat, bagflange










- Måleområde fra -50 op til 400 °C
- Husdiameter 63, 100 eller 160mm
- Kapillarrør op til 10m
- Mange monteringsmuligheder
- Helt i rustfrit stål




PRODUKTBESKRIVELSE

SPECIFIKATIONER

Capillary diameter	2 mm
Capillary length	3000 mm
Diameter	100 mm
Indstikslængde	100 mm
IP-klasse	IP65
Material Capillary	Rustfrit stål 316Ti
Materiale glas	Lamineret sikkerhedsglas
Materiale hus	Rustfrit stål
Materiale medieberørte del	Rustfrit stål
Omgivelsestemperatur fra	0 °C
Omgivelsestemperatur til	40 °C
Plug diameter	6 mm
Temperaturområde fra	0 °C
Temperaturområde til	100 °C
Trykmodstand max	25 bar

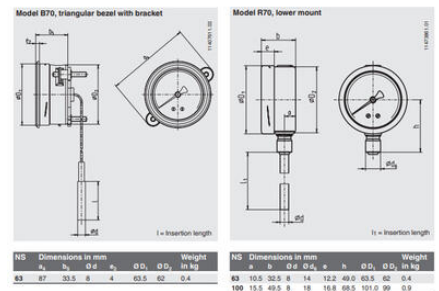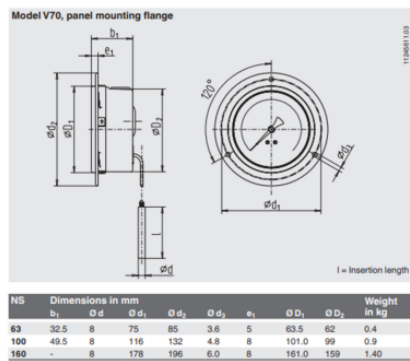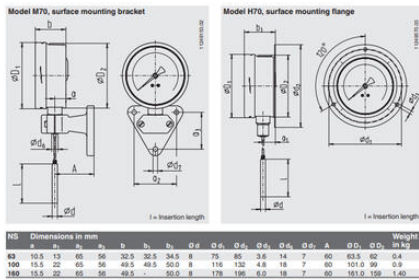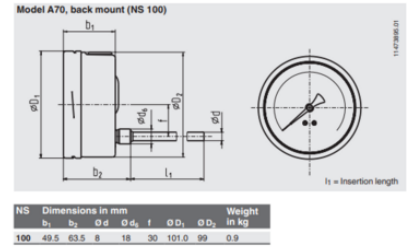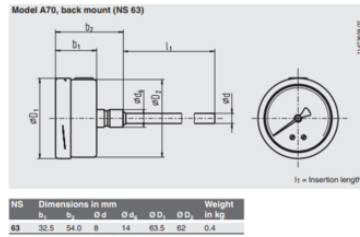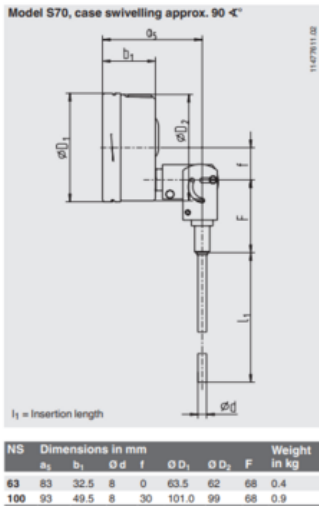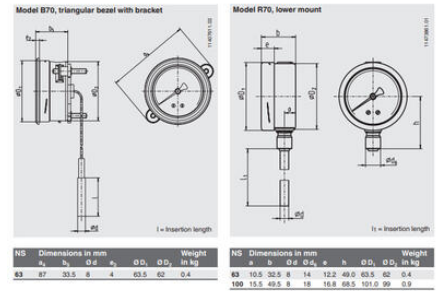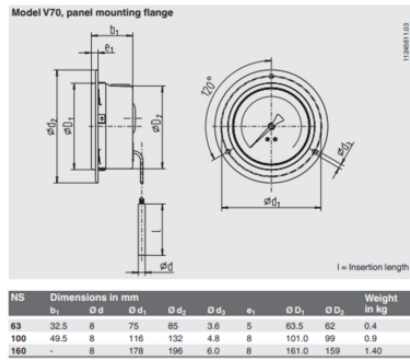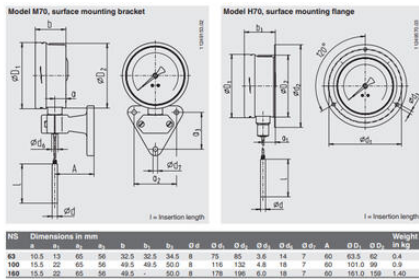


Model S70, case swivelling approx. 90 °C

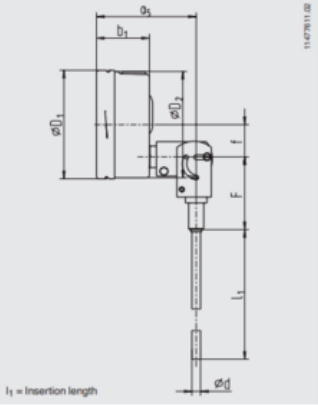


NS	Dimensions in mm							Weight in kg
	a ₁	b ₁	d	d ₁	d ₂	f	F	
63	83	32.5	8	0	63.5	62	68	0.4
100	93	49.5	8	30	101.0	99	68	0.9

Model A70, back mount (NS 63)

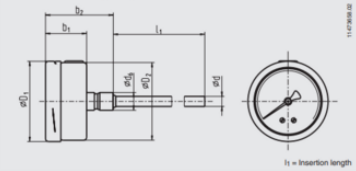

NS	Dimensions in mm							Weight in kg
	b ₁	b ₂	d	d ₁	d ₂	f	F	
63	32.5	94.0	8	14	63.5	62	0.4	

Model A70, back mount (NS 100)

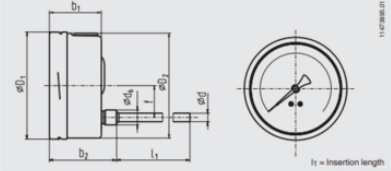

NS	Dimensions in mm							Weight in kg
	b ₁	b ₂	d	d ₁	d ₂	f	F	
100	49.5	63.5	8	18	30	101.0	99	0.9