



REDUKTIONSFLANGE - PTFE LINED

LMP Flourcarbon - korrosions resistent

REDFDN100/50D

PTFE Coated Reduktionsflange DN100/50 DIN


- Flange: Stål R-St 37-2
- Coating: Ren PTFE
- Temperaturområde: -200 til +260°C
- DIN standard
- Findes også ANSI standard



PRODUKTBESKRIVELSE

SPECIFIKATIONER


DN1/DN2	100,5 mm
Type	B
D	220 mm
K1	180 mm
N x D5	4xm16
N x d3	8xm16
L	45 mm
D2	102 mm
D1	158 mm

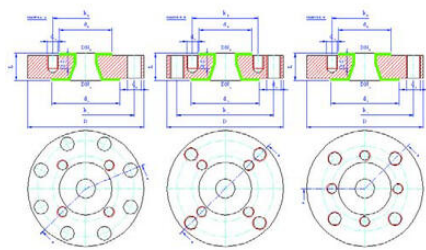

Type A

Type B

Type C

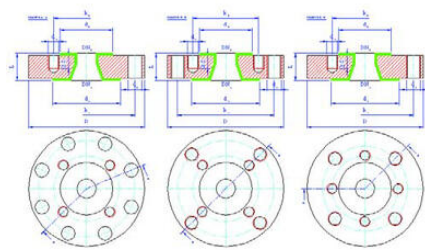

Type A

Type B

Type C