



REDUKTIONSFLANGE - PTFE LINED

LMP Flourcarbon - korrosions resistent

REDFDN40/25D

PTFE Coated Reduktionsflange DN40/25 DIN


- Flange: Stål R-St 37-2
- Coating: Ren PTFE
- Temperaturområde: -200 til +260°C
- DIN standard
- Findes også ANSI standard



PRODUKTBESKRIVELSE

SPECIFIKATIONER


DN1/DN2	40,25 mm
Type	A
D	150 mm
K1	110 mm
N x D5	4xm12
N x d3	4xm16
L	35 mm
D2	68 mm
D1	88 mm

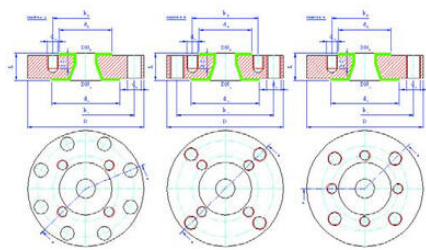

Type A

Type B

Type C

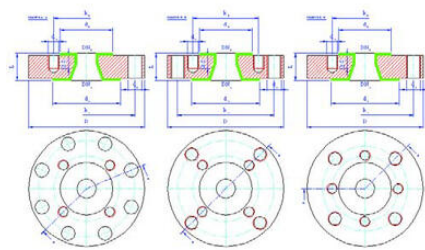

Type A

Type B

Type C