



REDUKTIONSFLANGE - PTFE LINED

LMP Flourcarbon - korrosions resistant

REDFDN50/15D

PTFE Coated Reduktionsflange DN50/15 DIN


- Flange: Stål R-St 37-2
- Coating: Ren PTFE
- Temperaturområde: -200 til +260°C
- DIN standard
- Findes også ANSI standard



PRODUKTBESKRIVELSE

SPECIFIKATIONER


DN1/DN2	50,15 mm
Type	C
D	165 mm
K1	125 mm
N x D5	4xm12
L	35 mm
D2	45 mm
D1	102 mm

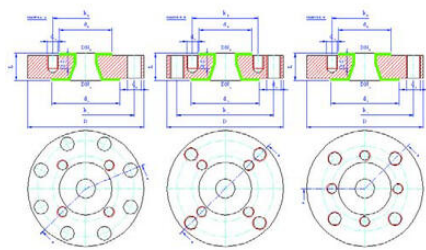

Type A

Type B

Type C

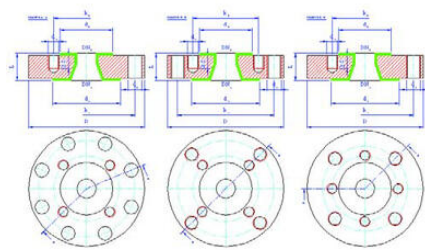

Type A

Type B

Type C