



REDUKTIONSFLANGE - PTFE LINED

LMP Flourcarbon - korrosions resistent

REDFDN50/20D

PTFE Coated Reduktionsflange DN50/20 DIN


- Flange: Stål R-St 37-2
- Coating: Ren PTFE
- Temperaturområde: -200 til +260°C
- DIN standard
- Findes også ANSI standard



PRODUKTBESKRIVELSE

SPECIFIKATIONER


DN1/DN2	50,2 mm
Type	B
D	165 mm
K1	125 mm
N x D5	4xm12
N x d3	4xm16
L	35 mm
D2	58 mm
D1	102 mm

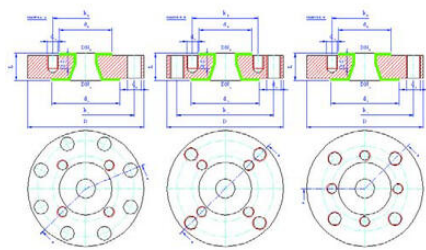

Type A

Type B

Type C

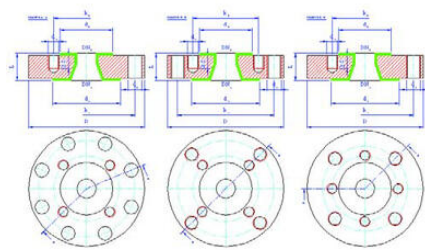

Type A

Type B

Type C