



REDUKTIONSFLANGE - PTFE LINED

LMP Flourcarbon - korrosions resistent

REDFDN80/50D

PTFE Coated Reduktionsflange DN80/50 DIN


- Flange: Stål R-St 37-2
- Coating: Ren PTFE
- Temperaturområde: -200 til +260°C
- DIN standard
- Findes også ANSI standard




PRODUKTBESKRIVELSE

SPECIFIKATIONER


DN1/DN2	80,5 mm
Type	B
D	200 mm
K1	160 mm
N x D5	4xm16
N x d3	8xm16
L	35 mm
D2	102 mm
D1	138 mm

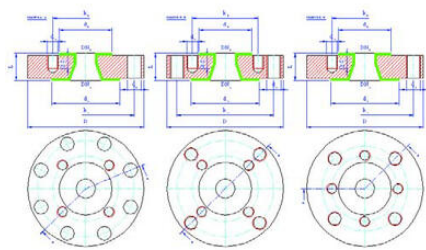


Type A




Type B




Type C

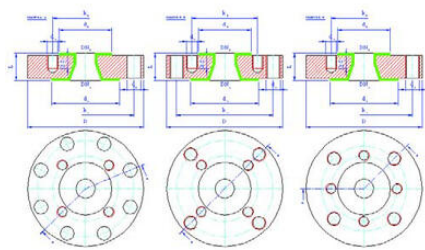

Type A



Type B



Type C