



REDUKTIONSFLANGE - PTFE LINED

LMP Flourcarbon - korrosions resistent

REDFDN100/15D

PTFE Coated Reduktionsflange DN100/15 DIN


- Flange: Stål R-St 37-2
- Coating: Ren PTFE
- Temperaturområde: -200 til +260°C
- DIN standard
- Findes også ANSI standard



PRODUKTBESKRIVELSE

SPECIFIKATIONER


DN1/DN2	100,15 mm
Type	B
D	220 mm
K1	180 mm
N x D5	4xm12
N x D4	8x18
L	45 mm
D2	45 mm
D1	158 mm

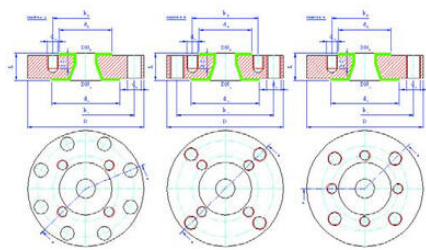

Type A

Type B

Type C

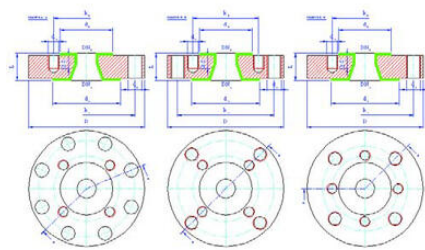

Type A

Type B

Type C