



REDUKTIONSFLANGE - PTFE LINED

LMP Flourcarbon - korrosions resistent

REDFDN250/50D

PTFE Coated Reduktionsflange DN250/50 DIN


- Flange: Stål R-St 37-2
- Coating: Ren PTFE
- Temperaturområde: -200 til +260°C
- DIN standard
- Findes også ANSI standard



PRODUKTBESKRIVELSE

SPECIFIKATIONER


DN1/DN2	250,5 mm
Type	C
D	395 mm
K1	350 mm
N x D5	4xm16
N x D4	12x22
L	45 mm
D2	102 mm
D1	320 mm

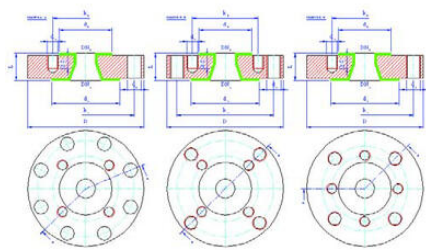

Type A

Type B

Type C

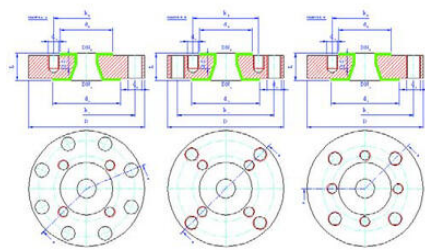

Type A

Type B

Type C