



REDUKTIONSFLANGE - PTFE LINED

LMP Flourcarbon - korrosions resistant

REDFDN300/250D

PTFE Coated Reduktionsflange DN300/250 DIN


- Flange: Stål R-St 37-2
- Coating: Ren PTFE
- Temperaturområde: -200 til +260°C
- DIN standard
- Findes også ANSI standard




PRODUKTBESKRIVELSE

SPECIFIKATIONER


DN1/DN2	300/250 mm
Type	B
D	445 mm
K1	400 mm
N x D5	12x20
N x d3	12x20
L	50 mm
D2	320 mm
D1	370 mm

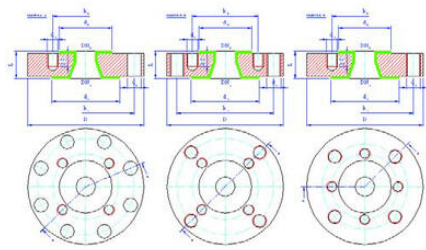


Type A




Type B




Type C

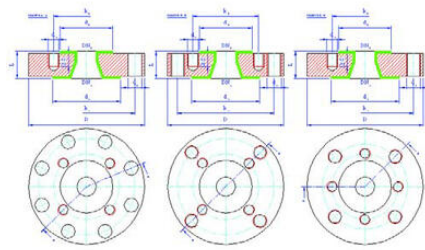

Type A



Type B



Type C