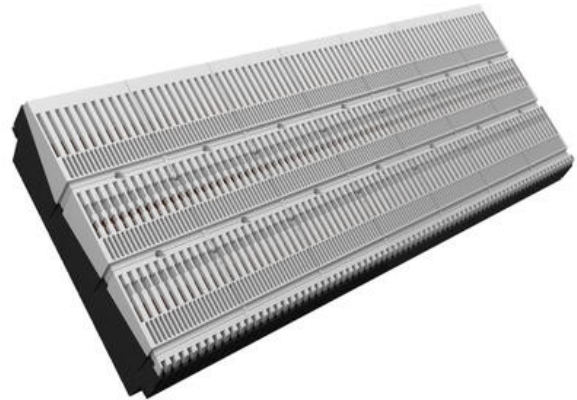


CROSSBOARD 800A

11605000

CrossBoard® 800A 500 mm

wöhner

PRODUKTBESKRIVELSE

SPECIFIKATIONER

2047_Dimensions width x height x depth (mm)	500x200x45 mm
2584_Rated surge voltage (Uimp)	6 kV
Antal poler	3
Conditional short-circuit current rms	80 kA
Nominal socket current	800 A
Rated insulation voltage Ui AC	1000 V
Rated short-time current (1s) Icw rms	40 kA
Rated voltage AC	800 V