

## S.90

2/2-vejs forniklet messing

90FFLH-1/4"

Muffe/muffe med langt håndtag

- Til applikationer med vand
- Fuldboret
- Tåler op til 40 bar
- Total vedligeholdelsesfrit
- Forkromet messingkugle for længere levetid



### PRODUKTBESKRIVELSE

Denne kugleventil kan anvendes til applikationer der indeholder vand. Ventilen er funktionsdygtig fra -20 | +170°C og tåler op til 30 bar.


VA-godkendt:

VA1.51/DK5716




SPECIFIKATIONER


|                   |                                 |
|-------------------|---------------------------------|
| Gevind            | 1/4"                            |
| Håndtag           | Plastovertrukket forniklet stål |
| Kugle             | Forkromet messing               |
| Materiale pakning | Teflon                          |
| Temperaturområde  | -20   170°C                     |
| Tryk max ved 20°  | 20 bar                          |
| Ventilhus         | Forniklet messing               |

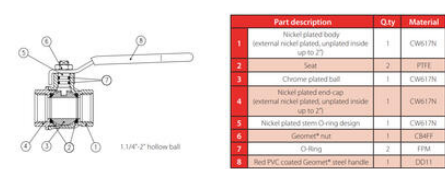

| Part description                                                           | Qty | Material |
|----------------------------------------------------------------------------|-----|----------|
| 1 Nickel plated body (external nickel plated, unplated inside up to 2")    | 1   | CW617N   |
| 2 Steel                                                                    | 2   | PTFE     |
| 3 Chrome plated ball                                                       | 1   | CW617N   |
| 4 Nickel plated end cap (external nickel plated, unplated inside up to 2") | 1   | CW617N   |
| 5 Nickel plated stem O-ring design                                         | 1   | CW617N   |
| 6 Geomet® nut                                                              | 1   | C346F    |
| 7 O-Ring                                                                   | 2   | FFM      |
| 8 Red PVC coated Geomet® steel handle                                      | 1   | DD11     |

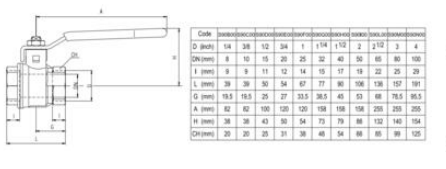

| Code     | 100  | 125  | 150 | 200 | 250  | 300   | 350   | 400 | 450   | 500  | 550  | 600 | 650 | 700 | 750 | 800 | 850 | 900 | 950 | 1000 |
|----------|------|------|-----|-----|------|-------|-------|-----|-------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|------|
| D (inch) | 1/4  | 3/8  | 1/2 | 3/4 | 1    | 1 1/4 | 1 1/2 | 2   | 2 1/2 | 3    | 4    |     |     |     |     |     |     |     |     |      |
| DN (mm)  | 8    | 10   | 15  | 20  | 25   | 32    | 40    | 50  | 65    | 80   | 100  |     |     |     |     |     |     |     |     |      |
| L (mm)   | 9    | 9    | 11  | 12  | 14   | 15    | 17    | 19  | 22    | 25   | 29   |     |     |     |     |     |     |     |     |      |
| L (mm)   | 39   | 39   | 50  | 54  | 67   | 77    | 85    | 106 | 136   | 157  | 191  |     |     |     |     |     |     |     |     |      |
| G (mm)   | 15.5 | 15.5 | 25  | 27  | 33.5 | 38.5  | 45    | 53  | 66    | 76.5 | 95.5 |     |     |     |     |     |     |     |     |      |
| A (mm)   | 62   | 62   | 100 | 120 | 120  | 158   | 158   | 158 | 205   | 205  | 255  |     |     |     |     |     |     |     |     |      |
| H (mm)   | 38   | 38   | 43  | 50  | 54   | 73    | 79    | 86  | 102   | 140  | 154  |     |     |     |     |     |     |     |     |      |
| DN (mm)  | 20   | 20   | 25  | 31  | 38   | 48    | 54    | 66  | 80    | 99   | 125  |     |     |     |     |     |     |     |     |      |

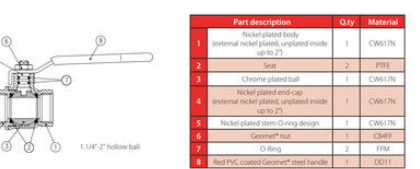

| Part description                                                           | Qty | Material |
|----------------------------------------------------------------------------|-----|----------|
| 1 Nickel plated body (external nickel plated, unplated inside up to 2")    | 1   | CW617N   |
| 2 Steel                                                                    | 2   | PTFE     |
| 3 Chrome plated ball                                                       | 1   | CW617N   |
| 4 Nickel plated end cap (external nickel plated, unplated inside up to 2") | 1   | CW617N   |
| 5 Nickel plated stem O-ring design                                         | 1   | CW617N   |
| 6 Geomet® nut                                                              | 1   | C346F    |
| 7 O-Ring                                                                   | 2   | FFM      |
| 8 Red PVC coated Geomet® steel handle                                      | 1   | DD11     |