

EFFEPI 3-VEJS LUKKEVENTIL TYPE \"B3\"

EFFB315DA

Kemi 3-vejs lukkeventil DN15 double acting

- Materiale: Bronze
- Aktuator: Aluminium
- Størrelser: DN15 - DN50
- Fås med Pneumatisk aktuator
- Temperaturområde: -20°C - +180°C



PRODUKTBESKRIVELSE

Bronze 3-vejs lukkeventil.

3-vejs ventil med 2 positioner. (3/2 ventil)

Leveres med pneumatisk aktuator med 360 graders montering.

Dette gør det nemt at få ventilen til at passe ind i installationen

Pakninger: PTFE eller FPM

Pakningen i stemplet er lavet i PTFE og forstærket med rustfrie stål fjedre lukker lufttæt.

Temperaturområder:

-20°C - +180°C

Aktuator tryk:

max 8 bar

Tilslutninger med GAS ISO228 hun-hun fittings.

trykluft tilslutninger GAS tilslutning 1/8"

DA: 1/2" - 3/4" - 1" - 1 1/4" - 1 1/2" - 2" (double acting)

SA: 1/2" - 3/4" - 1" - 1 1/4" - 1 1/2" - 2" (single acting)



Anodiserende behandlet udvendigt i aluminium


MINIMUM PRESSURE REQUIRED TO OPEN NC VERSION

G	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
BAR	4	4	4	4	4	4

DEVIATION: the fluid must cross the valve in the direction of the arrow printed on the body, as shown in drawing 1.

BLENDED: the fluid must cross the valve in the opposite direction of the arrow printed on the body, as shown in drawing 2.

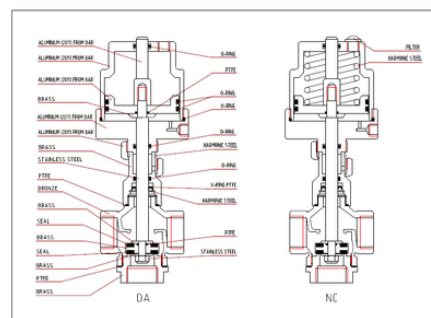


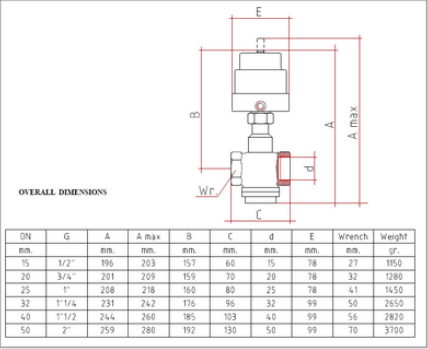


MINIMUM PRESSURE REQUIRED TO OPEN NC VERSION

G	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
BAR	4	4	4	4	4	4

DEVIATION: the fluid must cross the valve in the direction of the arrow printed on the body, as shown in drawing 1.



BLENDING: the fluid must cross the valve in the opposite direction of the arrow printed on the body, as shown in drawing 2.

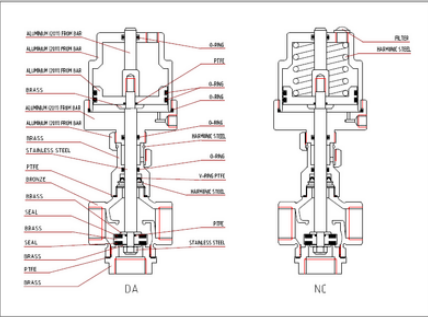

OVERALL DIMENSIONS

DN	G	A	A max	B	C	d	E	Wrench	Weight
mm		mm	mm	mm	mm	mm	mm	mm	kg
15	1/2"	196	203	157	60	15	78	27	1950
20	3/4"	201	209	159	70	20	78	32	1280
25	1"	208	218	160	80	25	78	41	1450
32	1 1/4"	231	242	176	96	32	99	50	2650
40	1 1/2"	244	260	185	103	40	99	56	2820
50	2"	259	280	192	130	50	99	70	3700