



TERMOELEMENT TIL HØJE TRYK

Serie TC90


TC90
Termoelement til høje tryk

- Måleområde op til 350°C
- For tryk op til 6000 bar
- Type K, J eller E
- Robust, vibrationsresistiv
- Materiale i 16580 eller 14542




PRODUKTBESKRIVELSE SPECIFIKATIONER


Materiale	Rustfri stål 1.4542
Temperaturområde til	350 °C
Trykomsråde max	6000 bar

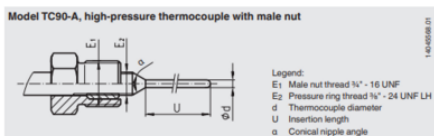




Sealing cone material	Dimensions in mm	
	α	d
CrNiMo steel 1.6580	10°, 59° or 60°	3.0, 3.17 or 4.5
Stainless steel 1.4542	10°, 59° or 60°	3.0, 3.17 or 4.5

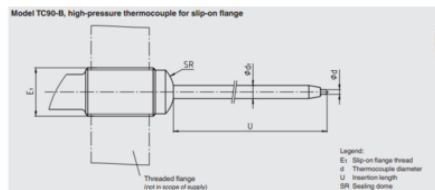


Sealing cone material	Dimensions in mm		d	d ₁
	SR	E1		
CrNiMo steel 1.6580	22 or 35	G 1 B, M30 x 2, 1 1/4 - 12 UNF or 1 1/4 UNF	3.0, 3.17 or 4.5	9.0 or 9.5
Stainless steel 1.4542	22 or 35	G 1 B, M30 x 2, 1 1/4 - 12 UNF or 1 1/4 UNF	3.0, 3.17 or 4.5	9.0 or 9.5

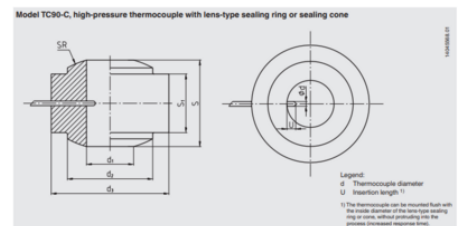

Sealing cone material	Dimensions in mm		d	d ₁
	SR	E1		
CrNiMo steel 1.6580	22 or 35	G 1 B, M30 x 2, 1 1/4 - 12 UNF or 1 1/4 UNF	3.0, 3.17 or 4.5	9.0 or 9.5
Stainless steel 1.4542	22 or 35	G 1 B, M30 x 2, 1 1/4 - 12 UNF or 1 1/4 UNF	3.0, 3.17 or 4.5	9.0 or 9.5

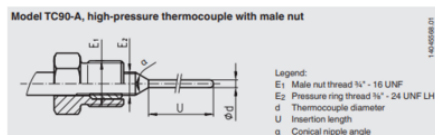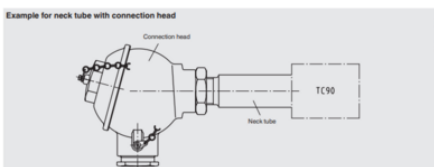


Sealing cone material	Dimensions in mm	
	α	d
CrNiMo steel 1.6580	10°, 59° or 60°	3.0, 3.17 or 4.5
Stainless steel 1.4542	10°, 59° or 60°	3.0, 3.17 or 4.5

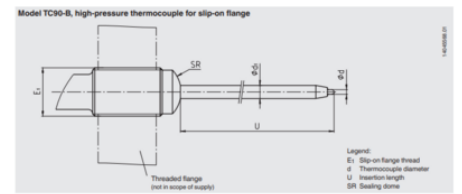


Sealing cone material	Dimensions in mm		d	d ₁
	SR	E1		
CrNiMo steel 1.6580	22 or 35	G 1 B, M30 x 2, 1 1/4 - 12 UNF or 1 1/4 UNF	3.0, 3.17 or 4.5	9.0 or 9.5
Stainless steel 1.4542	22 or 35	G 1 B, M30 x 2, 1 1/4 - 12 UNF or 1 1/4 UNF	3.0, 3.17 or 4.5	9.0 or 9.5

Model TC90-C, high-pressure thermocouple with lens-type sealing ring or sealing cone

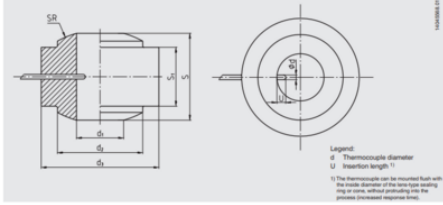

Example for neck tube with cable outlet



Example for neck tube with connection head

