



## MULTIPOINTFØLER FLEX-R

Serie TC96-R

TC96-R  
Multipointføler Flex-R




- Type K, J eller E
- Fra 1 op til 100 måtpunkter
- Fra 0,3 op til 20m lang
- Meget hurtig reaktionstid
- Muligt at tilpasse til eksisterende reaktorer



### PRODUKTBESKRIVELSE

## SPECIFIKATIONER




<b>Længde</b>	20000 mm
<b>Materiale</b>	Rustfrit stål 316L, Rustfrit stål 316Ti
<b>Materiale medieberørte del</b>	Legering, Kulstofstål

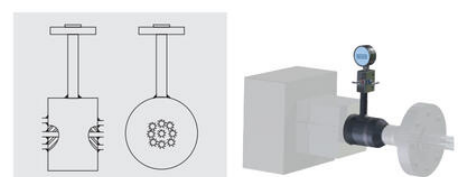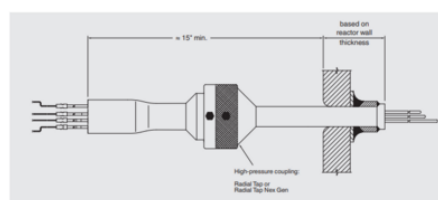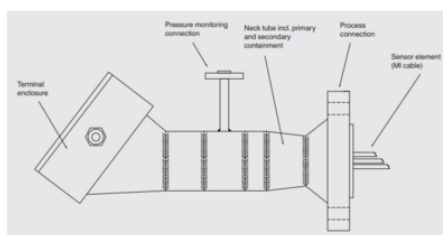

<b>Specifications</b>	Varies by process connection and number of thermocouples
<b>Diameter</b>	Inconel 825
<b>Material</b>	Inconel 825
<b>Connections</b>	Several different options like welding socket, flange connection oder valves are existing

The correct length of the TC96-R (Flex-R®) will be designed depending on the vessel data:

- Diameter
- Height
- Material

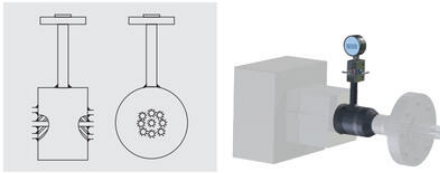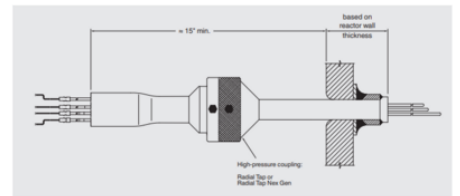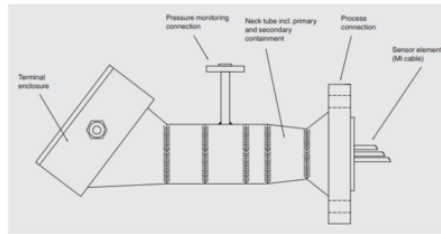

Specifications	
Diameter	Varies by process connection and number of thermocouples
Material	Inconel 625
Connections	Several different options like welding socket, flange connection or valves are existing

The correct length of the TC96-R (Flex-R®) will be designed depending on the vessel data:

- Diameter
- Height
- Material

