



MULTIPOINTFØLER FLEX-O

Serie TC96-O

TC96-O
Multipointføler Flex-O




- Op til 10 målepunkter
- Meget fleksibel installation
- "Rensningsrør"
- Op til 40m lang
- Option: Kan fås som modstandsfølere



PRODUKTBESKRIVELSE

SPECIFIKATIONER

Materiale	Rustfrit stål 316L, Rustfrit stål 316Ti
Materiale medieberørte del	Legering, Kulstofstål













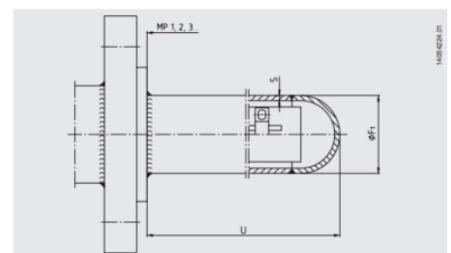
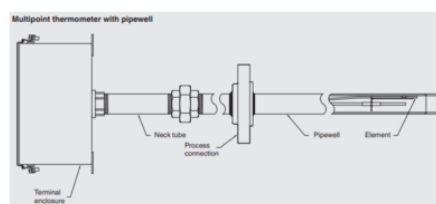
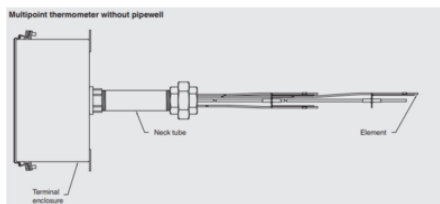


Pipe dimensions $\varnothing F_1$
 ■ 1 1/4 NPS
 ■ 1 1/2 NPS
 ■ 2 NPS
 ■ 3 NPS
 Other sizes available

Insertion length U
 Freely selectable (max. 40 m)

Material
 ■ Stainless steel 316
 ■ Stainless steel 316L
 Other materials available

■ Process connection

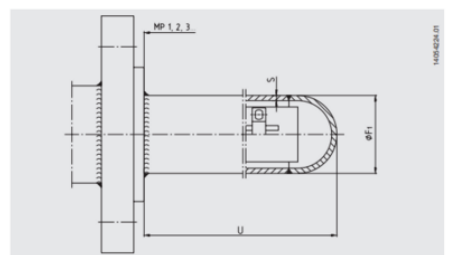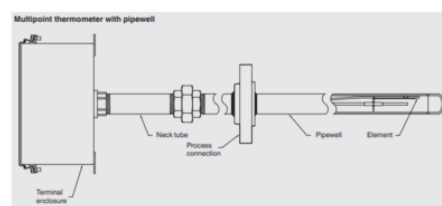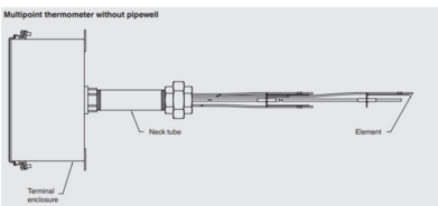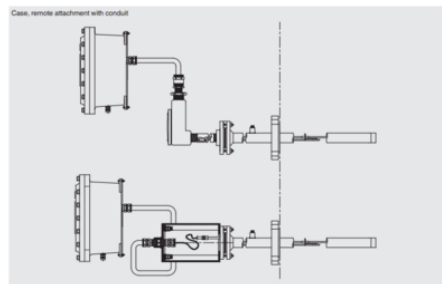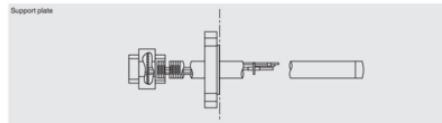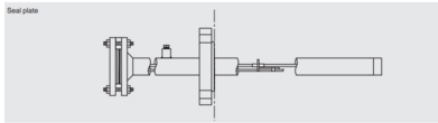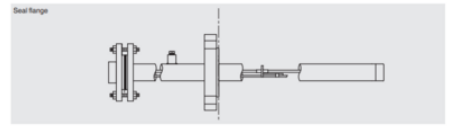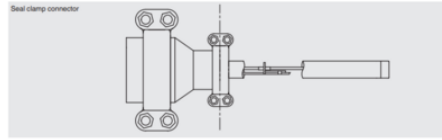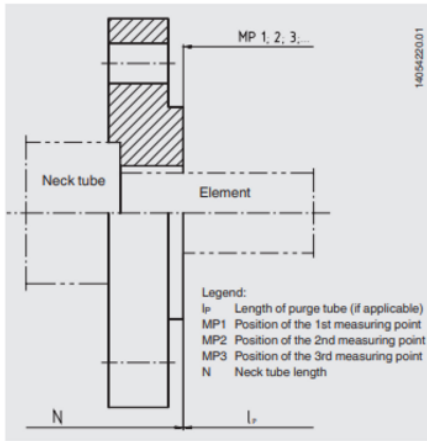

Pipe dimensions ϕF_1

- 1 1/4 NPS
- 1 1/2 NPS
- 2 NPS
- 3 NPS

Other sizes available

Insertion length U

Freely selectable (max. 40 m)

Material

- Stainless steel 316
- Stainless steel 316L

Other materials available

■ Process connection

