

# XTRACTO-PAD TIL MÅLING AF UDETEMPERATUR

Serie TC59-X

TC59-X  
XTRACTOR-PAD

- Måleområde fra 0 op til 1260°C
- Type K, J, N eller E
- Modstandsdygtig overfor mekanisk belastning
- Materiale i eksempelvis rustfrit stål, Hattelloy, Pyrosil D eller Haynes HR
- Option: ATEX-udførelse




## PRODUKTBESKRIVELSE

## SPECIFIKATIONER

Materiale medieberørte del	Hastelloy, Rustfrit stål
Temperaturområde fra	0 °C
Temperaturområde til	1260 °C




Fixed connection (compression fitting) to the furnace

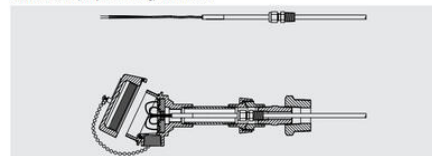

- Cable length 150 mm, other lengths on request
- Compensating cable type depending on the sensor type, PTFE-insulated
- The sealing from the process is performed by the compression fitting, it can be supplied in most common thread sizes.
- A connection head can be mounted directly to the neck or remotely.


Sliding connection (piston/spring) to the furnace

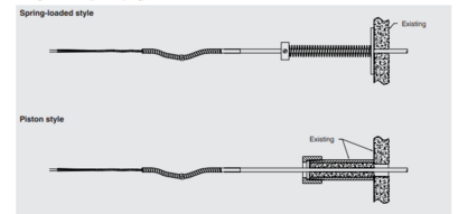


## Expansion loops

Expansion loops should be designed to account for maximum tube movement from startup position to operating temperature. Loops should be designed in accordance with allowable space available.

Examples of expansion loops:

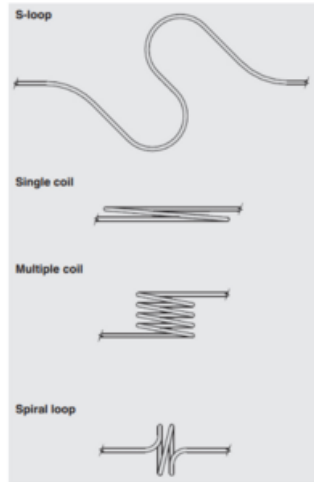


Fixed connection (compression fitting) to the furnace

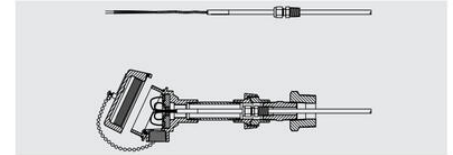

- Cable length 150 mm, other lengths on request
- Compensating cable type depending on the sensor type, PTFE-insulated
- The sealing from the process is performed by the compression fitting. It can be supplied in most common thread sizes.
- A connection head can be mounted directly to the neck or remotely

Sliding connection (piston/spring) to the furnace

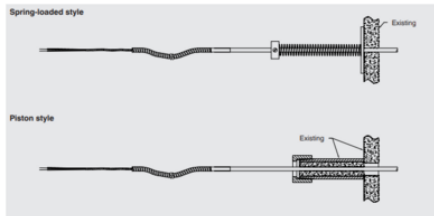

## Expansion loops

Expansion loops should be designed to account for maximum tube movement from startup position to operating temperature. Loops should be designed in accordance with allowable space available.

Examples of expansion loops:

