



TERMOELEMENT I FLAMMESIKKER UDFØRSEL (EX D)

Serie TC10-L

TC10L-14375341

Typee K 0-1260°C 150x6mm Ex D G1/3

- Måleområde fra -40 op til 1200°C
- Type K, J, E, N eller T
- Udskiftelig måleindsats
- Option: Dyklomme med gevind-, flange- eller svejsetilslutning
- Option: Transmitter med 4-20mA udgangssignal




PRODUKTBESKRIVELSE


SPECIFIKATIONER

Godkendelser, Atex	Ex-d
Indstikslængde	150 mm
IP-klasse	IP66
Material Sensor Body	Rustfrit stål 316Ti
Materiale hus	Aluminium
Materiale medieberørte del	Rustfrit stål 316Ti
Neck length	0,065 m
Omgivelsestemperatur fra	-40 °C
Omgivelsestemperatur til	80 °C
Plug diameter	6 mm
Temperaturområde fra	-40 °C
Temperaturområde til	1260 °C


"Nipple-union-nipple" neck tube

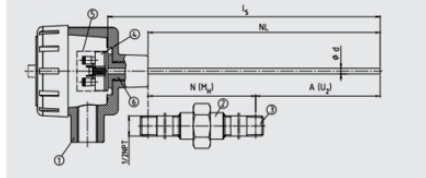


Double threaded hex bushing (tube section)

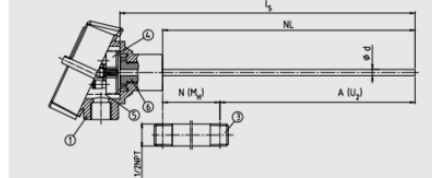


Double threaded hex bushing (with hexagonal spanner flats)

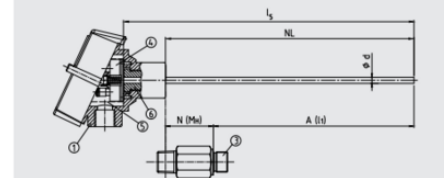


Neck tube with counter nut to head

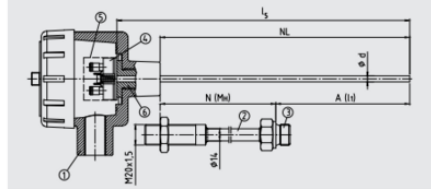


"Nipple-union-nipple" neck tube

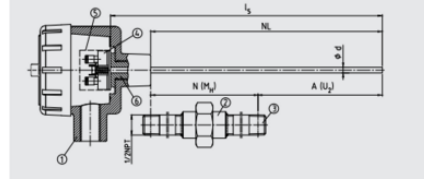

Double threaded hex bushing (tube section)

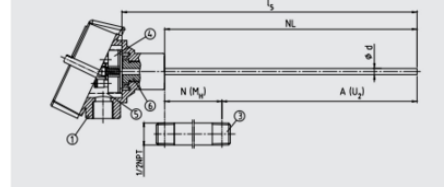

Double threaded hex bushing (with hexagonal spanner flats)

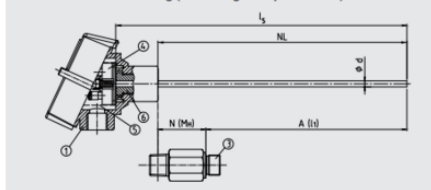

Neck tube with counter nut to head

