

EFFEPI 3-VEJS KUGLEVENTILER (\"T\") BORRET KUGLE TYPE F3T

EFFF3T15SA

Kemi messing 3-vejs kugleventil DN15 double acting

- Materiale: Messing OT58 nikkel belagt
- Medier: Gas, Olie, Væske
- Størrelser: DN15 - DN50
- Fås med pneumatisk aktuator
- Temperaturområde: -15°C - +100°C



PRODUKTBESKRIVELSE

Messing 3-vejs kugleventil med roterende pneumatisk aktuator.

Ventilkrop: Messing OT58 nikkel belagt.

Kugle: Messing OT58 heavy duty forkromet.

Pakning: Virgin PTFE

Funktioner: 3-vejs (2 positioner)

Temperaturområder:

-15°C - +100°C

Max temperatur for special brug (ventil fuldt open):

+100°C brændstofs olier, mineral olier og mageriner

+90°C hav og drikkevand

+60°C trichlorethylen, butan, methan, propan, carbon dioxide

+40°C Alkohol, benzin, lette gasser, naturlige gasser, lime vand, sodavand.

Aktuator tryk:

Double acting fra 4 - 8 bar

Single acting fra 6 - 8 bar

Tilslutninger med GAS ISO228 hun-hun fittings.

Kan leveres med NPT-forbindelser

GAS tilslutning 1/8"

DA: 1/2" - 3/4" - 1" - 1"1/4 - 1"1/2 - 2" (double acting)



SA: 1/2" - 3/4" - 1" - 1"1/4 - 1"1/2 - 2" (single acting)

Anodiserende behandlet udvendigt i aluminium

DOUBLE ACTING											
DN	G	ASSEMBLY	A	B	C	d	E	F	ASSEMBLY	PN	Weight
mm		Type	mm	mm	mm	mm	mm	mm	mm	mm	kg
15	1/2"	SE4302	225	208	80	13	77	43	27	4	1624
20	3/4"	SE4302	225	208	80	13	77	43	27	4	2042
25	1"	SE4010	271	242	103	23	102	81	43	8	2620
32	1 1/4"	SE4010	281	254	100	23	102	81	43	8	4182
42	1 1/2"	SE4010	298	262	107	23	102	81	43	8	5420
50	2"	SE4014	375	342	133	33	118	102	53	10	8300

SINGLE ACTING											
DN	G	ASSEMBLY	A	B	C	d	E	F	ASSEMBLY	PN	Weight
mm		Type	mm	mm	mm	mm	mm	mm	mm	mm	kg
15	1/2"	SE4302	225	208	80	13	77	43	27	4	1780
20	3/4"	SE4302	225	208	80	13	77	43	27	4	2150
25	1"	SE4010	271	242	103	23	102	81	43	8	3140
32	1 1/4"	SE4010	281	254	100	23	102	81	43	8	4560
42	1 1/2"	SE4010	298	262	107	23	102	81	43	8	7080
50	2"	SE4014	375	342	133	33	118	102	53	10	10500

OVERALL DIMENSIONS

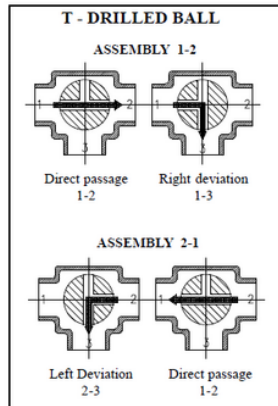



RATED PRESSURE "PN"

G	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
PN	40	40	25	16	16	16

DOUBLE ACTING											
DN	G	ASSEMBLY	A	B	C	d	E	F	ASSEMBLY	PN	Weight
mm		Type	mm	mm	mm	mm	mm	mm	mm	mm	kg
15	1/2"	SE4302	225	208	80	13	77	43	27	4	1640
20	3/4"	SE4302	225	208	80	13	77	43	27	4	2060
25	1"	SE4010	271	242	103	23	102	81	43	8	2640
32	1 1/4"	SE4010	281	254	100	23	102	81	43	8	4200
42	1 1/2"	SE4010	298	262	107	23	102	81	43	8	5440
50	2"	SE4014	375	342	133	33	118	102	53	10	8360

SINGLE ACTING											
DN	G	ASSEMBLY	A	B	C	d	E	F	ASSEMBLY	PN	Weight
mm		Type	mm	mm	mm	mm	mm	mm	mm	mm	kg
15	1/2"	SE4302	225	208	80	13	77	43	27	4	1780
20	3/4"	SE4302	225	208	80	13	77	43	27	4	2150
25	1"	SE4010	271	242	103	23	102	81	43	8	3140
32	1 1/4"	SE4010	281	254	100	23	102	81	43	8	4560
42	1 1/2"	SE4010	298	262	107	23	102	81	43	8	7080
50	2"	SE4014	375	342	133	33	118	102	53	10	10500

OVERALL DIMENSIONS

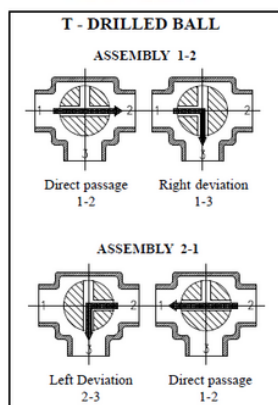

RATED PRESSURE "PN"

G	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
PN	40	40	25	16	16	16