

EFFEPI 3-VEJS LUKKEVENTIL TYPE "B3"

EFFB315DA

Kemi 3-vejs lukkeventil DN15 double acting

- Materiale: Bronze
- Aktuator: Aluminium
- Størrelser: DN15 - DN50
- Fås med Pneumatisk aktuator
- Temperaturråde: -20°C - +180°C



PRODUKTBESKRIVELSE

Bronze 3-vejs lukkeventil.

3-vejs ventil med 2 positioner. (3/2 ventil)

Leveres med pneumatisk aktuator med 360 graders montering.

Dette gør det nemt at få ventilen til at passe ind i installationen

Pakninger: PTFE eller FPM

Pakningen i stemplet er lavet i PTFE og forstærket med rustfrie stål fjedre lukker lufttæt.

Temperaturråder:

-20°C - +180°C

Aktuator tryk:

max 8 bar

Tilslutninger med GAS ISO228 hun-hun fittings.

trykluft tilslutninger GAS tilslutning 1/8"



DA: 1/2" - 3/4" - 1" - 1"1/4 - 1"1/2 - 2" (double acting)


SA: 1/2" - 3/4" - 1" - 1"1/4 - 1"1/2 - 2" (single acting)

Anodiserende behandlet udvendigt i aluminium

MINIMUM PRESSURE REQUIRED TO OPEN NC VERSION

G	1/2"	3/4"	1"	1"1/4"	1"1/2"	2"
BAR	4	4	4	4	4	4

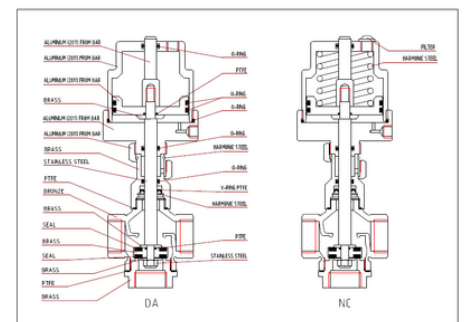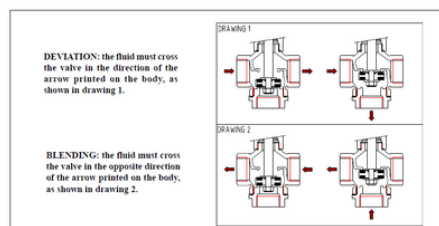

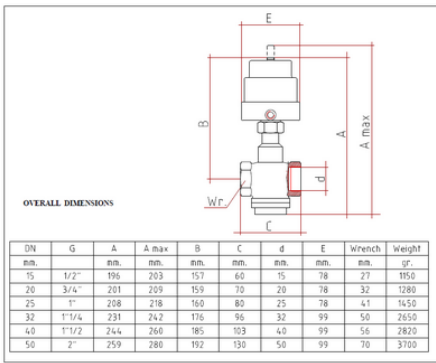

MINIMUM PRESSURE REQUIRED TO OPEN NC VERSION

G	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
BAR	4	4	4	4	4	4

