

LUMISTAR EX LAMPER, ATEX

Aluminium

P-L3541.001.00

USL 06-Ex skueglas lampe 12V/20W



- Alle Ex skueglas lamper er godkendte til Zone 1
- Forsyningsspænding afhængig af type:
12V/24V/120V/230V
- Effekt afhængig af størrelse: 20W, 50W, 100W
- Anvendelig til skueglas armatur DIN28120/DIN28121 og DIN11851
- De fleste i beskyttelsesklasse IP 65 og IP 67 iht. DIN EN 60529



PRODUKTBESKRIVELSE

Lumistar Ex lamper til montering på glasfittings:

Denne type belysning til skueglas er designet til universelle anvendelser i eksplosionsfarlige omgivelser. Lumistar Ex lamper er ideelle til brug i kombineret syns- og lysanordning (enkeltflange version) eller med to separate porte (2-flange version).


Kompakt design - kraftig lysudgang:

Egnet til cirkulære blikglasbeslag til DIN 28120 / DIN 28121 eller lignende, skruetype glasfittings i overensstemmelse med DIN 11851 og til visuelle flowindikatorer.

Generøs lysåbning og bekvem lampeudskiftning takket være optimalt designet skruet linselukning.

Anvendes til belysning af tanke, beholdere, siloer, omrørere og andre for det meste lukkede applikationer, beholdere og reaktorer samt visuelle flowindikatorer i eksplosionsfarlige omgivelser. Velegnet til brug i fødevarerindustrien.

• Dimensions and electrical data for stainless steel Lumistar luminaires USL 06-Ex:

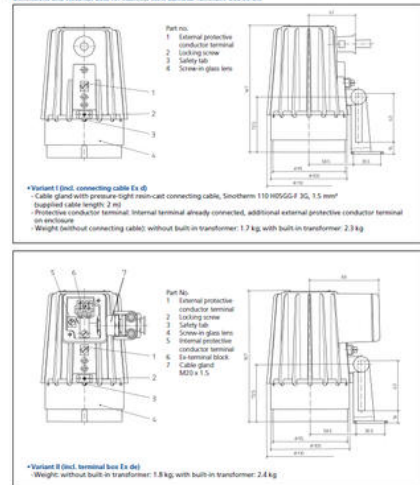

• Dimensions and electrical data for Lumistar luminaires USL 05-Ex and USL 05-LED-Ex:


Part no.	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
1	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
2	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
3	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
4	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
5	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
6	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
7	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
8	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
9	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
10	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
11	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
12	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
13	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
14	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
15	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
16	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
17	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
18	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
19	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
20	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
21	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
22	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
23	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
24	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
25	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
26	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
27	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
28	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
29	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
30	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
31	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
32	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
33	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
34	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
35	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
36	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
37	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
38	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
39	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
40	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
41	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
42	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
43	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
44	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
45	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
46	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
47	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
48	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
49	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
50	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
51	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
52	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
53	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
54	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
55	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
56	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
57	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
58	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
59	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
60	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
61	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
62	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
63	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
64	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
65	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
66	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
67	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
68	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
69	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
70	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
71	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
72	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
73	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
74	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
75	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
76	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
77	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
78	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
79	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
80	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
81	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
82	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
83	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
84	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
85	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
86	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
87	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
88	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
89	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
90	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
91	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
92	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
93	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
94	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
95	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
96	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
97	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
98	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
99	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens
100	External protective conductor terminal	Locking screw	Safety tab	Screw-in glass lens

Order data:
• g. Lumistar luminaire USL 05-Ex, 12 V/20 W, Part no. 3540-035.00, with accessories: hinged bracket, Part no. 6354-018.00 and claw spanner, Part no. 6816-001.00


Accessories:

No.	Component	Part No.
1	Luminaire mounting, hinged bracket, stainless steel	6354-018.00
2	Luminaire mounting, flanged adapter collar, stainless steel	1354-010.00
3	Lumiglas timer module, Ex timer switch, external, for timed light switching on request	on request
4	Claw spanner for screw-in lens, for opening the lamp	6816-001.00


• Dimensions and electrical data for Lumistar luminaires USL 09-Ex:

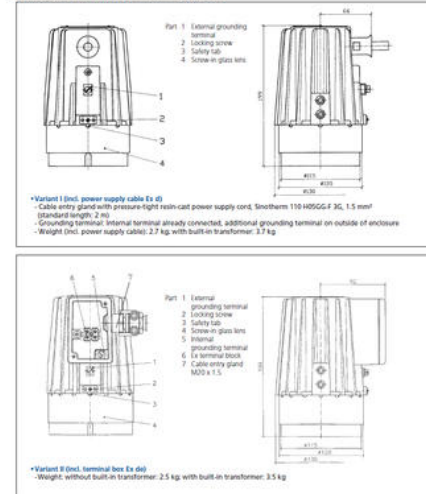


• Dimensions and electrical data for Luminaire luminaires USL 08 Ex:



- Pos. Part
- 1 Body of luminaire
 - 2 Mounting bracket
 - 3 Lens
 - 4 Mounting bracket with terminal
 - 5 Mounting bracket with terminal
 - 6 Mounting bracket with terminal
 - 7 Mounting bracket with terminal



- Terminal compartment open, housing cover removed
- Body of luminaire made of non-corrosive cast aluminum alloy, G4-AG10Mg
- Light aperture as unit made of aluminum ring and glass with O-ring seal
- Fastening parts: see Accessories G-AG10Mg
- Weight: 2.2 kg



- Terminal compartment open, housing cover removed
- Body of luminaire made of non-corrosive cast aluminum alloy, G4-AG10Mg
- Light aperture as unit made of aluminum ring and glass with O-ring seal
- Fastening parts: see Accessories G-AG10Mg
- Weight: 2.2 kg

• Parts, design and materials:

- Luminaire shell (1) and cover (2)
- AISI 316-L stainless-steel aluminum alloy
- AISI 316-L stainless steel 1.4304
- Screw-type cable gland M20 x 1.5 (3)
- Light port as a unit consisting of a ring (4)
- Aluminum or stainless steel and glass (5)
- Mounting with hinged bracket (2) stainless steel 1.4301 (7) to be ordered extra
- Weight: AISI 316-L: 1.8 kg; AISI 316-L: 3.8 kg

• Accessories - to be ordered separately:

- Mounting hinged bracket, part no. 0354.025.00
- Mounting attachment flange adapter collar for use with screw-type right glass fittings (on request)
- Time delay module, external, for time-dependent lighting
- Pushbutton or switch
- Optional 10° or 20° light aperture reflector

• Mechanical installation:

- When installing the round right glass fitting or the right flow indicator, the luminaire is mounted on the cover flange with the hinged bracket. With the screw-type right glass fitting, the lamp is mounted on the ground nut or by means of a flange attachment - see (3) below.


The luminaire luminaires AISI 316-L and AISI 316-L are compatible with the following external dimensions:

- a) Circular right glass fitting acc. to DIN 28120: DN 40
- b) Circular right glass fitting acc. to DIN 28120: DN 40
- c) Light glasses in flow indicators: DN 50
- d) Screw-type right glass fittings similar to DN 11851
- DN 50 is mounted by way of a separate flange attachment from DN 50 up, the unit is secured using the hinged bracket.



Luminaire luminaires AISI 316-L and AISI 316-L have a special adapter in the light port as a standard feature, making this type of lamp ideal for applications in acidic and basic environments. Excellent results are assured by using right glasses fused to a metal frame (METAGLAS) and with the BioControl (BIOCONT) range of products. METAGLAS® combines optimally with clamp fittings (METACLAAMP) as well as with Na Connect™ technology.

• For luminaire luminaires intended for sterile environments, the following installation and fastening method is pre-tive proven:

- The luminaire is fitted over the flange with the lamp on the cover flange, where it is secured in place. An O-ring inserted between the two effectively seals the closure to the light port. An alternative is to mount the luminaire by means of an adapter (opened joint acc. to DIN 2324/ISO 2852). The mating flange to the lamp connection is a special adapter construction with a fused-in light glass (metal-glass fusion), see Example 1.
- When used with screw-type right glass fittings, the metal-glass ring is provided with a reference lip over which the luminaire luminaire is fitted. An O-ring is inserted to seal the joint, tightening the clamp then provides the necessary closing pressure, see Example 2.




Dimensions for Luminaire luminaires AISI 316-L and AISI 316-L



Example 1

• Dimensions and electrical data for Luminaire luminaires AISI316L Ex:

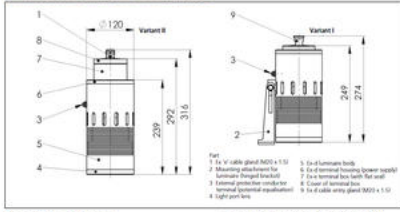

- Part
- 1 AISI 316-L cable gland M20 x 1.5
 - 2 AISI 316-L cable gland M20 x 1.5
 - 3 AISI 316-L cable gland M20 x 1.5
 - 4 AISI 316-L cable gland M20 x 1.5
 - 5 AISI 316-L cable gland M20 x 1.5
 - 6 AISI 316-L cable gland M20 x 1.5
 - 7 AISI 316-L cable gland M20 x 1.5
 - 8 AISI 316-L cable gland M20 x 1.5
 - 9 AISI 316-L cable gland M20 x 1.5

• Components, design and materials:

- Luminaire body (1) and cover of terminal box (2): Aluminum alloy EN AW-2007, paint finish RAL 9007
- Light port lens (3): Unit consisting of ring flange aluminum alloy EN AW-2007, paint finish RAL 9007, and borosilicate glass
- Hinged mounting bracket (2): Stainless steel 1.4301 (see accessories)
- Cable gland (3): M20 x 1.5
- Weight (with 2 m connecting cable): 4.6 kg

• Connecting data: Temperature classification and electrical penetration line (see EC Type Examination Certificate)

Item	AISI316L-Ex	Part No.	Voltage V	Mounting	Ambient temperature range -20°C ≤ T _a ≤ +40°C
Variant 1 (with connecting cable 2 m)					
1	Q4-VI 25 W	3541.484.00	24	1 high-power LED	20 78°C
2	(120-230 V) 25 W	3541.482.00	120-230	1 high-power LED	20 78°C
Variant 2 (with integrated terminal box)					
3	Q4-VI 25 W	3541.483.00	24	1 high-power LED	20 78°C
4	(120-230 V) 25 W	3541.481.00	120-230	1 high-power LED	20 78°C

• For variant 1 only combinations of the following cable entry glands and cables should be used:

Cable gland type	Cable type
M20x1.5, metal-plated brass (by Hummel)	Offices heat 180, part no. 3403.045.00, 3x1.5 mm ² at 8.9 mm
EC100M20 (and alpha 8) part no. 9103.190.00	Offices heat 180, part no. 3403.045.00, 3x1.5 mm ² at 10.3 mm
M20x1.5, metal-plated brass (by BSH)	Offices Classic 110 black, part no. 3403.051.00, 3x1.5 mm ² at 10.1 mm

• Accessories:

Item	Component	Part No.
1	Luminaire mounting - hinged bracket	0354.025.00
2	Luminaire mounting - flange adapter collar for welding on M20 x 1.5 (M20) and M20 x 1.5	M20 x 1.5 (M20) and M20 x 1.5
3	Ex-time delay switch	on request

• Order data: e.g. Luminaire luminaire AISI316L-Ex (Q4-VI 25 W, Ex d HC T6 with 2 m connecting cable, part no. 3541.484.00

all dimensions in mm unless otherwise stated; all connecting cables: 30 °C