

LUMISTAR CYLINDRISKE LAMPER

Rustfri stål & letvægts design

P-LS3540.685.00

USL 13-UL skueglas lampe 120V/50W



- Forsyningsspænding afhængig af type:
12V/24V/120V/230V
- Effekt afhængig af størrelse: 20W, 20W, 100W
- Anvendelig til skueglas armatur DIN28120/DIN28121 OG DIN11851
- Med eller uden ON/OFF knap
- Støv og vandstråle tæt iht. IP 65 og EN 60 529 / DIN VDE 0470 part 1




PRODUKTBESKRIVELSE

Med en perfekt kombination af spoleskruet samling og glat overflade er Lumistar cylindriske lamper designet til montering på skueglas i universelle applikationer. Lumistar er ideel til brug i kombinerede syns- og lyseporte (enkelt-flange version) eller monteret separat (to-flange version). Den integrerede fastgørelsesklemme muliggør bekvem montering på Lumiglas skueglas SW I.

- Type USL 31, 33, 35 og 36 er særdeles velegnet til montage i aseptiske områder
- Ved korrekt montage er lampen støv og vandstråle tæt iht. IP 65 og EN 60 529 / DIN VDE 0470 part 1
- UL-godkendte for udvalgte varianter

• Dimensions and electrical data for Lumistar luminaires USL 13 and USL 33 and UL-listed types:

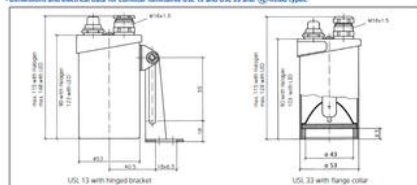

• Components and materials:
- Luminaire body and cover: Stainless steel 1.4564
- Hinged bracket and flange collar for attachment to screw-type right glass fitting DIN 30950: Stainless steel 1.4301
- Connecting cable 1 m (3 x 0.75 mm²) works fitted
- Weight: 0.58 kg

• Connection data:

Item	Type	Nominal voltage V	Push-button	Transformer	Socket	USL 13 Part. No.	USL 33 Part. No.	USL 13-UL Part. No.	USL 33-UL Part. No.
1	USL 13 20 W	12	with	without	G1/8, 35	1540.186.00	1540.181.00	—	—
2	USL 13 20 W	12	without	without	G1/8, 35	1540.207.00	1540.142.00	—	—
3	USL 13 20 W	24	with	without	G5	1540.208.00	1540.223.00	1540.481.00	1540.483.00
4	USL 13 20 W	24	without	without	G5	1540.209.00	1540.224.00	1540.482.00	1540.484.00
5	USL 13 20 W	120	with	without	G1/8, 35	1540.210.00	1540.212.00	—	—
6	USL 13 20 W	120	without	without	G1/8, 35	1540.211.00	1540.213.00	—	—
7	USL 13 20 W	120	with	without	BA15d	—	—	1540.503.00	1540.505.00
8	USL 13 20 W	120	without	without	BA15d	—	—	1540.504.00	1540.506.00
9	USL 13 20 W	230	with	without	G9	1540.217.00	—	—	—
10	USL 13 50 W	12	with	without	G1/8, 35	1540.215.00	1540.216.00	—	—
11	USL 13 50 W	24	with	without	G1/8, 35	1540.217.00	1540.218.00	1540.505.00	1540.507.00
12	USL 13 50 W	120	with	without	BA15d	—	—	1540.485.00	1540.487.00
13	USL 13 50 W	120	with	without	G1/8, 35	1540.219.00	1540.221.00	—	—
14	USL 13 50 W	120	without	without	G1/8, 35	1540.220.00	1540.222.00	—	—
LED Version									
15	USL 13 1 W	24	with	Wandler	G5d	1541.414.00	—	—	—
16	USL 13 1 W	24	without	Wandler	G5d	1541.415.00	1541.417.00	—	—

Further versions on request.

• Accessories (for USL 13 only):

Item	Luminaire mounting	Part No.
1	Flange collar DN 50, stainless steel (no hinged mounting bracket required)	1354.000004
2	Flange collar DN 65, stainless steel (no hinged mounting bracket required)	1356.000005