



GASFYLDT TERMOMETER TIL EKSTREME VIBRATIONER

Serie 75

M75

Gasfyldt termometer med høj vibrationsmodstand

- Måleområde fra 150 op til 600°C
- Diameter 100mm
- Montering nedaf eller bagud
- Robust design og væskedæmpede
- Helt i rustfrit stål




PRODUKTBESKRIVELSE


SPECIFIKATIONER

Diameter	100 mm
IP-klasse	IP66
Materiale glas	Lamineret sikkerhedsglas
Materiale hus	Rustfri stål 1.4301
Materiale medieberørte del	Rustfrit stål 316Ti
Omgivelsestemperatur fra	0 °C
Omgivelsestemperatur til	60 °C
Plug diameter	13 mm
Temperaturområde fra	150 °C
Temperaturområde til	600 °C
Trykmodstand max	25 bar
Væskedæmpet	Nej

Model R75.100, lower mount (LM)

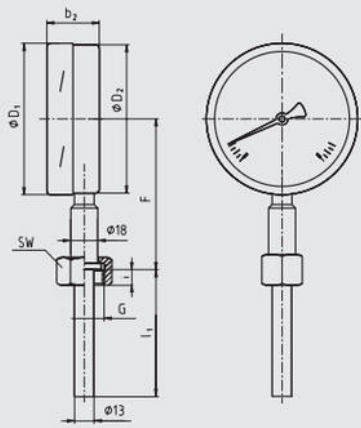


Model A75.100, back mount (BM)

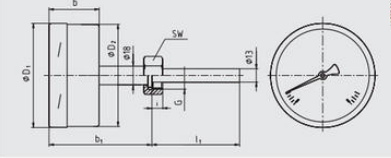


Design 2, male nut
Standard insertion length li = 120, 140, 160, 230 mm

Nominal size	Process connection	Dimensions in mm		
NS	G	L	SW	D d
100	G 1/2 B	22	32	13



Design 3, union nut
Standard insertion length li = 89, 126, 186, 226, 276 mm

Nominal size	Process connection	Dimensions in mm		
NS	G	L	SW	D d
100	G 1/2 B	10,5	32	13



Design 4, compression fitting (sliding on stem)
Insertion length li = variable
Length L = li + 40 mm

Nominal size	Process connection	Dimensions in mm		
NS	G	L	SW	D d
100	G 1/2 B	16	32	13
	1/2 NPT	20	30	13

