



MULTIPOINTFØLER FLEX-R

Serie TC96-R

TC96-R
Multipointføler Flex-R




- Type K, J eller E
- Fra 1 op til 100 måtpunkter
- Fra 0,3 op til 20m lang
- Meget hurtig reaktionstid
- Muligt at tilpasse til eksisterende reaktorer



PRODUKTBESKRIVELSE

SPECIFIKATIONER

Længde	20000 mm
Materiale	Rustfrit stål 316L, Rustfrit stål 316Ti
Materiale medieberørte del	Legering, Kulstofstål

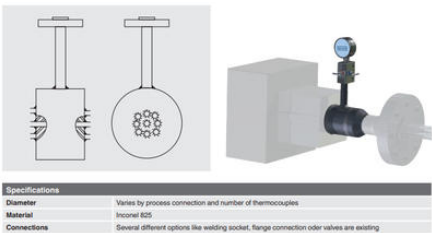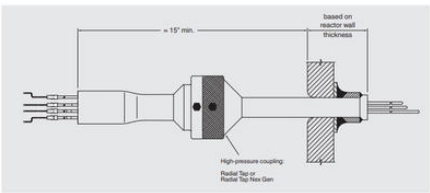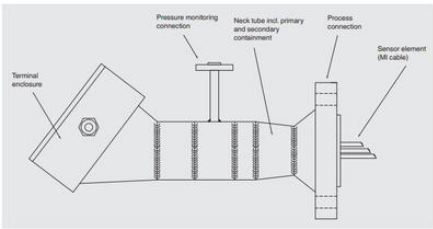

Specifications	
Diameter	Varies by process connection and number of thermocouples
Material	Inconel 625
Connections	Several different options like welding socket, flange connection oder valves are existing

The correct length of the TC96-R (Flex-R®) will be designed depending on the vessel data:

- Diameter
- Height
- Material

