


PH-2600

- CV: 0.02, 0.06, 0.15 og 0.24
- Temperatur: -40°C til 74°C
- Sanitary, Tube og High Purity Connections
- Low Flows
- FDA Compliant




Alle regulatorer i denne serie er specielt udviklet til pharma- og biotekindustrien. De er alle i rustfri stål og kan leveres med al nødvendig dokumentation. Det er single-stage regulatorer, der yder en meget nøjagtig regulering. Designet af denne serie sikrer en høj gasrenhed og integritet og kan med fordel anvendes ved ren damp i sanitære applikationer, i paneler eller til regulering af specialgasser og hvor dannes affaldsgasser.

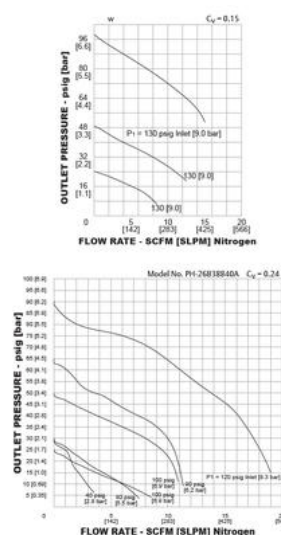

Example for selecting a part number:

PH-26		I		II		F		Z		O		U	
BASIC SERIES	BODY MATERIAL	BODY WALL THICKNESS	SEAT MATERIAL	SEAT WALL THICKNESS	VALVE SPRING	LOAD TYPE	OUTLET PORT TYPE	INLET AND OUTLET PORT TYPE	INLET AND OUTLET PORT TYPE	SEAT WALL THICKNESS	FLOW CAPACITY	GASGE PORT OPTIONS	CERTIFICATES OF CONFORMANCE
PH-26	A - 216L	15.74	FFTE	216	Stainless Steel	4 - Spring	0.19" port 0.63" BSF	4 - 1/2" NPT 0.78" BSF	4 - 21P (Tale Only) 0.7275" OD	0 - C ₁ = 0.82 0 - C ₂ = 0.86 2 - C ₃ = 0.11	0 - No gaskets 0 - C ₁ = 0.86 2 - C ₂ = 0.11	0 - None 0 - Class 0 - Service	
	D - 216L	15.74	FFTE	216	Stainless Steel	1 - Spring	0.19" port 0.54" BSF	1 - 1/2" NPT 0.69" OD	0 - C ₁ = 0.82 0 - C ₂ = 0.86	0 - No gaskets 0 - C ₁ = 0.86 2 - C ₂ = 0.11	0 - None 0 - Class 0 - Service		
	C - 216L	22.74	FFTE	216	Stainless Steel	2 - Spring	0.19" port 0.54" BSF	2 - 1/2" NPT 0.69" OD	0 - C ₁ = 0.82 0 - C ₂ = 0.86	0 - No gaskets 0 - C ₁ = 0.86 2 - C ₂ = 0.11	0 - None 0 - Class 0 - Service		
	D - 216L	22.74	FFTE	216	Stainless Steel	4 - Spring BSF 0.19" port 0.54" BSF	4 - 1/2" NPT 0.78" BSF	4 - 21P (Tale Only) 0.7275" OD	0 - C ₁ = 0.82 0 - C ₂ = 0.86 2 - C ₃ = 0.11	0 - No gaskets 0 - C ₁ = 0.86 2 - C ₂ = 0.11	0 - None 0 - Class 0 - Service		

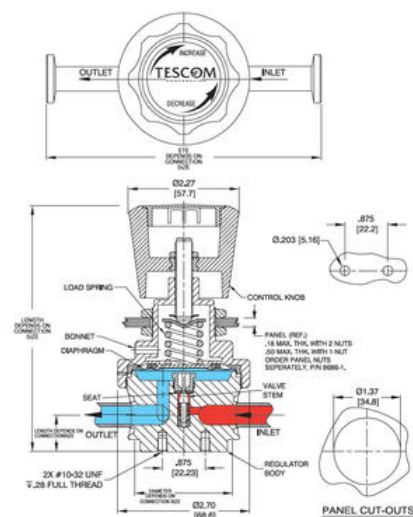

All dimensions are reference & nominal
Metric (in/decimal) equivalents are in brackets