

PRISVENLIG, HØJ NØJAGTIGHED, SPRING OG DOME LOADED, DIAPHRAGM SENSOR

44-2900 Serien Backpressure Regulator

44-2900

44-2900 Serien

- Pressure Range: 0-0.83, 0-1.7, 0-3.4, 0-6.9, 0-10.3 bar
- Design Proof Pressure: 150% maximum rated
- Leakage: Internal: Bubble-tight - External: Design to meet < 2x10⁻⁸ atm cc/sec He
- Temperaturområde: -26 til 74°C
- CV: 0.30



PRODUKTBESKRIVELSE

TESCOM 44-2900 Serien


Backpressure regulator som er kompakt designet, med høj nøjagtighed og som er ideel til bruge til industrielle gasser med flows op til 20 SCFM / 566 SLPM. Den convoluted AISI 316 Stainless Steel diaphragm giver en superæn nøjagtighed og repeatability; metal to metal diaphragm seal minimere potentiallet for leakage.

Applikationer

- R&D laboratories
- Process systems
- Pilot plants

Fordele

- 316 Stainless Steel diaphragm giver metal-to metal sealing integritet og god sensitivity
- Stor sensor seat areal ratio som giver en lav crack to reseal tryk differential og superæn repeatability
- Bubble-tight shutoff ved alle reseating pressures
- Flow capacity Cv = 0.3
- Panel montering som standard
- Ideel til non-korrosive og korrosive gasser

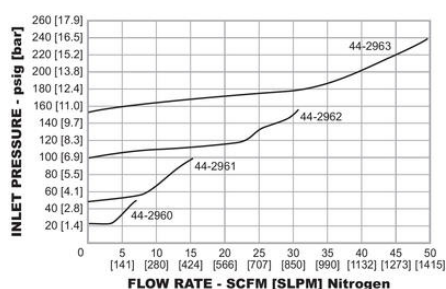

Example for selecting a part number:

BASIC SERIES	BODY MATERIAL	CONTROLLED PRESSURE RANGES	DIAPHRAGM MATERIAL	INLET AND OUTLET PORT TYPE	INLET AND OUTLET PORT SIZE	GAUGE PORT OPTIONS
44-29	6 - 316 Stainless Steel	0 - 0.25 psig 0 - 1.7 bar 1 - 0.50 psig 0 - 3.4 bar 2 - 0.100 psig 0 - 6.9 bar 3 - 0.150 psig 0 - 10.3 bar 4 - 0.12 psig 0 - 0.83 bar	T - (304) (316/304 AL) K - (316) P - Polytetrafluoroethylene (Kalar®)	2 - NPT	4 - 1/4"	A - No gauge ports T - 1/8" inlet gauge at 90°

