

KOMPAKT, SPRING OG DOME LOADED, PISTON SENSOR

BB-3 Serien Backpressure Regulator

BB-3
BB-3 Serien

- Inlet Pressure range: 0-5.5,, 0-9.7, 0-15.2, 0-48,3, 0-82.7, 0-17.2 bar
- Design Proof Pressure: 150% of maximum pressure
- Temperaturområde: -26 til 60°C
- Internal Leakage: Bubble-tight
- CV: 0.2



PRODUKTBESKRIVELSE

TESCOM BB-3 Serien

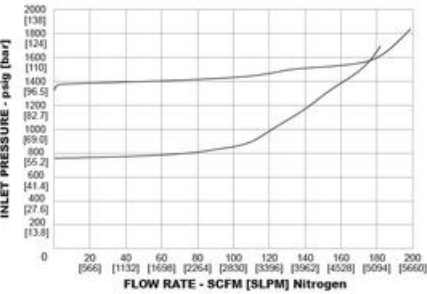
Regulator til højt tryk, lavt flow, miniature backpressure regulator. Seks trykkontrol ranges op til 83 bar outlet. Denne regulator kan bruges til hydraulik eller pneumatisk service og den er lille og kompakt, og vejer kun 0.11 kg som standard Aluminum konstruktion (også tilgængelig i AISI 316 Stainless Steel)

Applikationer

- Portable equipment
- OEM equipment

Fordele

- Prisvenlig og kompakt
- Durable piston sensor design
- Højt flow kapacitet
- Høj temperatur version op til 96°C
- Close pressure differential between crack and reseal
- Bubble-tight shutoff ved tryk reseal
- Seks kontrollerbare tryk ranges

[illegible]