

HØJT FLOW, HØJT TRYK, DOME LOADED, DIAPHRAGM SENSOR

26-1100 serien Trykreducerede Regulator



26-1100

26-1100 serien

- Max indgangstryk: 690 bar
- Max udgangstryk: 690 bar
- Temperaturområde: -40 til 74°C
- CV: 0.46, 1.30
- Bubble-tight



PRODUKTBESKRIVELSE

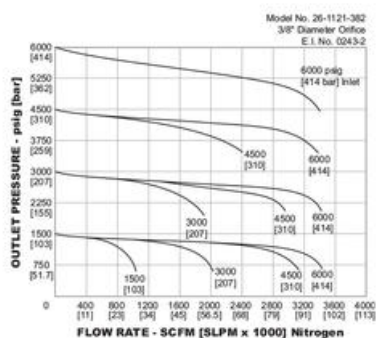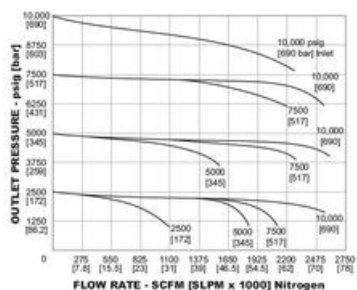

Example for selecting a part number:

26-11	2	1	3	8	1
BASIC SERIES	BODY MATERIAL	LOADING METHOD	INLET AND OUTLET PORT TYPE	DOME PORT	INLET AND OUTLET PORT SIZE
26-11	1 - Brass 2 - 303 Stainless Steel 3 - Aluminum 2024-T351 4 - 316 Stainless Steel	1 - Internally loaded	1 - 1/4\"	1 - 1/4\" MS23649 2 - NPT 3 - MS23649 4 - 1/4\" MS23649	1 - 1/2\" 2 - 1/2\" 3 - 1/2\" 4 - 1/2\"

