

SEGREGATED OG CAPTURED VENTING, HØJT TRYK, SPRING, DOME OG AIR LOADED, PISTON SENSOR

26-2000 serien Trykreducerede Regulator

26-2000

26-2000 serien

- Max indgangstryk: 1034 bar
- Max udgangstryk: 413 bar
- Temperaturområde: -26 til 73°C
- CV: 0.02, 0.06, 0.12, 0.30
- Bubble-tight



PRODUKTBESKRIVELSE

Tescom 26-2000 serien

højt tryk, lavt flow piston sensor regulator også tilgængelig i dome, spring og air load versioner. Denne regulator kan leveres med "segregated captured venting" standard med max indgangstryk på 413-1034 bar.

Applikationer

- R&D labs
- Pressure filling
- Calibration testing
- Burst testers
- Component testing
- High pressure hydraulic or pneumatic applications

Fordele

"Segregated captured venting" som standard

3 loading metoder - spring, dome, and air actuated


Tilgængelig med soft og metal-to-metal seating

Standard 40 micron intern filter (soft seated models) forlænger service life


Højt flow version med Cv of 0.30 tilgængelig

God sammen med Tescom ER5000 Electropneumatic Controller


SPRING LOADED



DOME LOADED




AIR LOADED




Example for selecting a part number:

26-28	6	1	A	2	4	5	1	7	8
BASIC BODY MATERIAL	MAXIMUM INLET PRESSURE	OUTLET PRESSURE	SOFT GOOD MATERIAL	INLET AND OUTLET PORT TYPE	INLET AND OUTLET PORT SIZE	FLOW CAPACITY (Cv)	MAIN VALVE AND SEAT MATERIAL	CABLE PORT OPTIONS (1/2" NPT)	
26-28 1 - Brass	8000 psig	Spring Load	A - PTFE	1 - SAE	1/4" SAE	4 - 1.2	1 - 82	1 - 1/2" 1/2"	8 - None
4 - 316	16,000 psig	16,000 psig	B - 316SS, 316L SS	2 - NPTF	1/4" NPTF	8 - 2.0	1 - 82	1 - 1/2" 1/2"	1 - One Outlet Gauge at BP
Stainless Steel	8000 psig	16,000 psig	C - 316SS, 316L SS	2 - NPTF	1/4" NPTF	8 - 2.0	1 - 82	1 - 1/2" 1/2"	2 - Two Gauge Ports at BP
Steel	8000 psig	16,000 psig	D - 316SS, 316L SS	2 - NPTF	1/4" NPTF	8 - 2.0	1 - 82	1 - 1/2" 1/2"	4 - Four Gauge Ports at BP
Steel	8000 psig	16,000 psig	E - 316SS, 316L SS	2 - NPTF	1/4" NPTF	8 - 2.0	1 - 82	1 - 1/2" 1/2"	1 - One Outlet Gauge at BP
Steel	8000 psig	16,000 psig	F - 316SS, 316L SS	2 - NPTF	1/4" NPTF	8 - 2.0	1 - 82	1 - 1/2" 1/2"	2 - Two Gauge Ports at BP
Steel	8000 psig	16,000 psig	G - 316SS, 316L SS	2 - NPTF	1/4" NPTF	8 - 2.0	1 - 82	1 - 1/2" 1/2"	4 - Four Gauge Ports at BP
Steel	8000 psig	16,000 psig	H - 316SS, 316L SS	2 - NPTF	1/4" NPTF	8 - 2.0	1 - 82	1 - 1/2" 1/2"	1 - One Outlet Gauge at BP
Steel	8000 psig	16,000 psig	I - 316SS, 316L SS	2 - NPTF	1/4" NPTF	8 - 2.0	1 - 82	1 - 1/2" 1/2"	2 - Two Gauge Ports at BP
Steel	8000 psig	16,000 psig	J - 316SS, 316L SS	2 - NPTF	1/4" NPTF	8 - 2.0	1 - 82	1 - 1/2" 1/2"	4 - Four Gauge Ports at BP
Steel	8000 psig	16,000 psig	K - 316SS, 316L SS	2 - NPTF	1/4" NPTF	8 - 2.0	1 - 82	1 - 1/2" 1/2"	1 - One Outlet Gauge at BP
Steel	8000 psig	16,000 psig	L - 316SS, 316L SS	2 - NPTF	1/4" NPTF	8 - 2.0	1 - 82	1 - 1/2" 1/2"	2 - Two Gauge Ports at BP
Steel	8000 psig	16,000 psig	M - 316SS, 316L SS	2 - NPTF	1/4" NPTF	8 - 2.0	1 - 82	1 - 1/2" 1/2"	4 - Four Gauge Ports at BP
Steel	8000 psig	16,000 psig	N - 316SS, 316L SS	2 - NPTF	1/4" NPTF	8 - 2.0	1 - 82	1 - 1/2" 1/2"	1 - One Outlet Gauge at BP
Steel	8000 psig	16,000 psig	O - 316SS, 316L SS	2 - NPTF	1/4" NPTF	8 - 2.0	1 - 82	1 - 1/2" 1/2"	2 - Two Gauge Ports at BP
Steel	8000 psig	16,000 psig	P - 316SS, 316L SS	2 - NPTF	1/4" NPTF	8 - 2.0	1 - 82	1 - 1/2" 1/2"	4 - Four Gauge Ports at BP
Steel	8000 psig	16,000 psig	Q - 316SS, 316L SS	2 - NPTF	1/4" NPTF	8 - 2.0	1 - 82	1 - 1/2" 1/2"	1 - One Outlet Gauge at BP
Steel	8000 psig	16,000 psig	R - 316SS, 316L SS	2 - NPTF	1/4" NPTF	8 - 2.0	1 - 82	1 - 1/2" 1/2"	2 - Two Gauge Ports at BP
Steel	8000 psig	16,000 psig	S - 316SS, 316L SS	2 - NPTF	1/4" NPTF	8 - 2.0	1 - 82	1 - 1/2" 1/2"	4 - Four Gauge Ports at BP
Steel	8000 psig	16,000 psig	T - 316SS, 316L SS	2 - NPTF	1/4" NPTF	8 - 2.0	1 - 82	1 - 1/2" 1/2"	1 - One Outlet Gauge at BP
Steel	8000 psig	16,000 psig	U - 316SS, 316L SS	2 - NPTF	1/4" NPTF	8 - 2.0	1 - 82	1 - 1/2" 1/2"	2 - Two Gauge Ports at BP
Steel	8000 psig	16,000 psig	V - 316SS, 316L SS	2 - NPTF	1/4" NPTF	8 - 2.0	1 - 82	1 - 1/2" 1/2"	4 - Four Gauge Ports at BP
Steel	8000 psig	16,000 psig	W - 316SS, 316L SS	2 - NPTF	1/4" NPTF	8 - 2.0	1 - 82	1 - 1/2" 1/2"	1 - One Outlet Gauge at BP
Steel	8000 psig	16,000 psig	X - 316SS, 316L SS	2 - NPTF	1/4" NPTF	8 - 2.0	1 - 82	1 - 1/2" 1/2"	2 - Two Gauge Ports at BP
Steel	8000 psig	16,000 psig	Y - 316SS, 316L SS	2 - NPTF	1/4" NPTF	8 - 2.0	1 - 82	1 - 1/2" 1/2"	4 - Four Gauge Ports at BP
Steel	8000 psig	16,000 psig	Z - 316SS, 316L SS	2 - NPTF	1/4" NPTF	8 - 2.0	1 - 82	1 - 1/2" 1/2"	1 - One Outlet Gauge at BP

SPRING LOADED

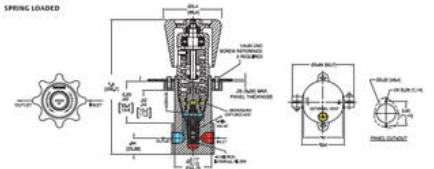

DOME LOADED

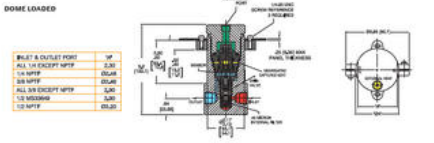

AIR LOADED

